
Metal flush-mount wall box kit 4 double elements with 1 double sockets, 2 dual UPS and 2 plates 2 RJ45 graphite Simon 500 Cima

REF. **51002401-036**

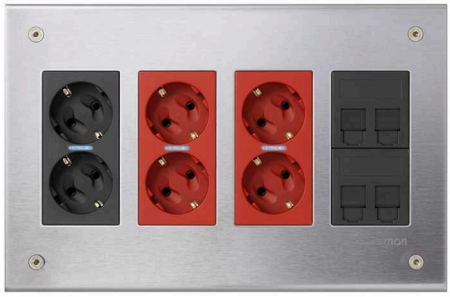

BASIC INFORMATION

FINISH
Stainless steel

MATERIAL
Stainless steel

PACKAGING CONTENTS
Flush-mount wall kit, metal partition wall, ground connection cable and installation manual

ETIM CLASS
EC002601

REMARKS
The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

COMPATIBLE WITH CONNECTORS
Simon©, AMP netconnect© Standard 110, SL110, SL Tool-less, 216000 and 216005, Brand-Rex©, ADC Krone© KM8 Keystone, BeldenCDT© Giga Flex Keystone, Ersys©, General Cable©, Molex©, Panduit© Netkey, Ortronics© Clarity TechChoice Keystone, Rit© and other manufacturers with Keystone snap-fit system.

NUMBER OF CONNECTORS
4

RJ45 CONNECTORS
Not included

DUST SHUTTER
Yes

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the rail fitted into the box for this purpose.

FORMAT
Schuko

NUMBER OF ENCLOSURES FOR GROUND CONNECTION
Dedicated rail in the box structure

INDICATOR FUNCTION
Yes

CURRENT (A)
16 A

IP RATING
IP20

LED CONSUMPTION INDICATOR (MA)
0.55

LINKABLE
Yes, using accessory included 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
8

MONOBLOCK
Yes

NUMBER OF PLATES
2 voice and data plates

PLATE TYPE
Flat

RECESS DIMENSION (MM)
170 x 271 mm

RJ45 ADAPTOR MODULE
Included in voice and data plates

NUMBER OF SIDE ENTRANCES
4

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, Keystone II and Systimax

NUMBER OF SOCKETS
1 double socket for standard current circuit and 2 double sockets for stable current circuits

VERSION
4 double elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 2 and 30 mm

REMOVAL OF CONNECTOR

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
Using the claws included in the enclosure, in combination with aggregates, binders, additives, etc.

REMOVAL OF THE FRAME
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima (supplied with the frame)

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for flush mounting on the wall

REMOVAL OF THE PLATE
Only with tool

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053100851

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.12

PRODUCT NET WEIGHT
2.12

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053100851

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
69

PACKAGING WIDTH
188

PACKAGING LENGTH
289

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
3.749

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.12

PACKAGING WEIGHT UNIT
KGM

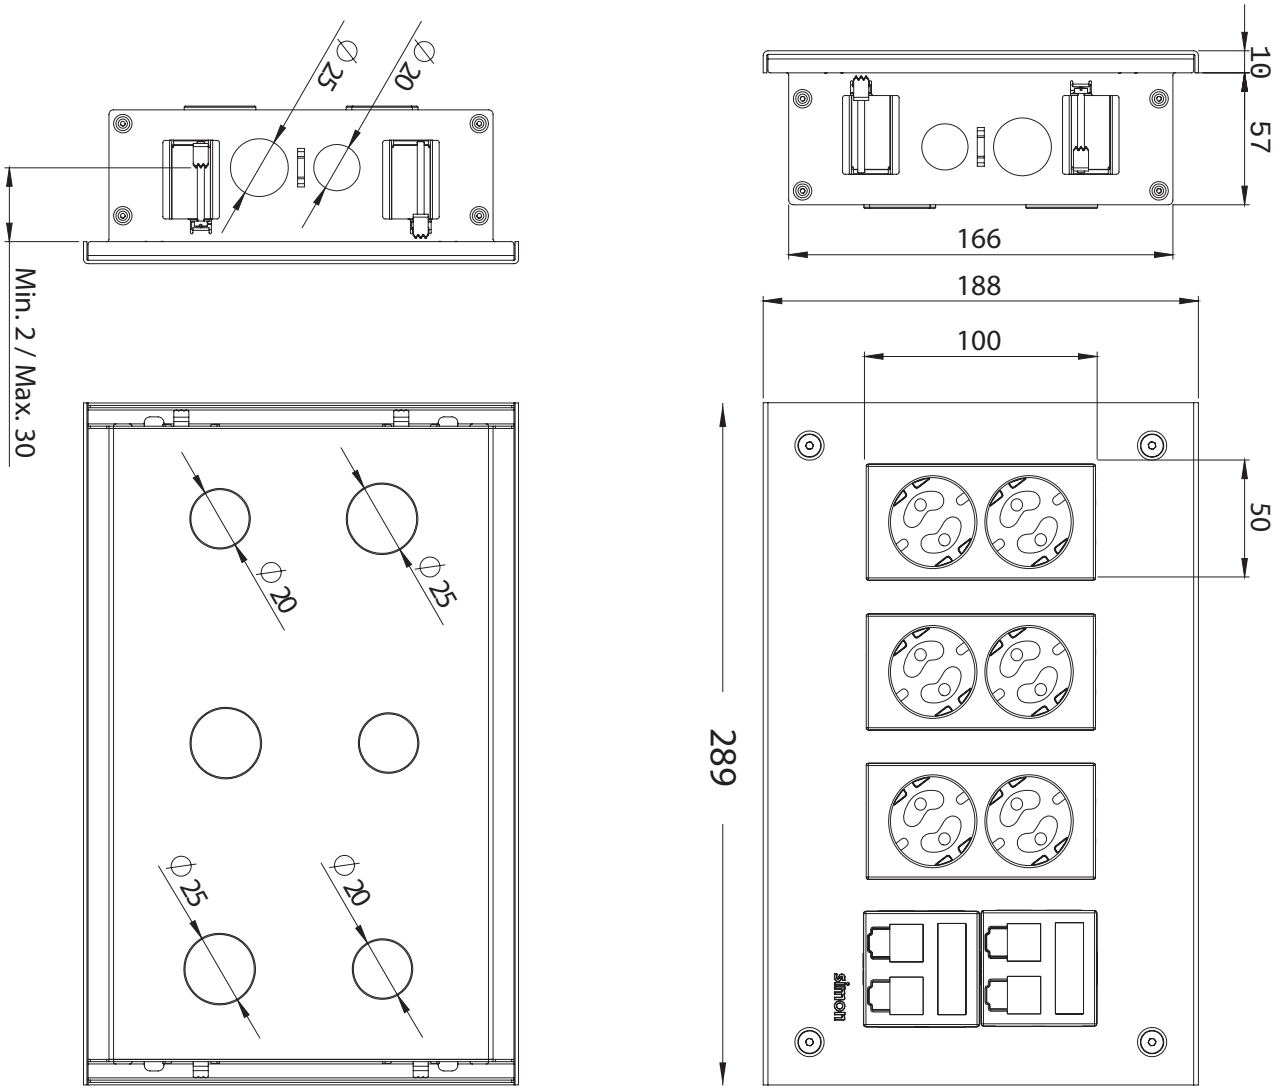
Ø25
Ø20
Min. 2 / Max. 30
Ø20
Ø25
Ø25
Ø20
10
57
166
188
100
50
289
simon