
Framework for 4 elements in adjustable floor box graphite Simon 500 Cima

REF. **52051802-038**

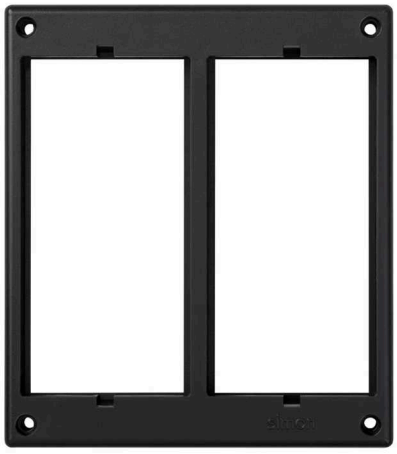

BASIC INFORMATION

DESCRIPTION

With this framework in adjustable floor box and finished in graphite of the Simon 500 Cima series obtained the highest workplace solutions in your workplace, as well as the maximum security, being made of thermoplastic completely halogen-free, which guarantees no flame propagation in case of fire and the low toxicity in case of smoke. It has 4 elements and 4 modules and its dimensions are 132 x 116 x 16 millimetres. The adjustable floor boxes include the framework in white finish is recommended, in this case to combine this product with the adjustable floor boxes in graphite finish, suitable for concrete floor and raised floor through the adjustable floor boxes. Performance, security, durability, but also design. Simon always thinks of covering any type of requiring demanding the highest quality in each of the products that launched on the market.

FINISH

Graphite

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework in a white finish. It is recommended to combine this product with the graphite-finish adjustable floor boxes.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

4 modules

RAL

7021

VERSION

4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254837

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.049

PRODUCT NET WEIGHT
0.049

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093276

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
112

PACKAGING WIDTH
117

PACKAGING LENGTH
269

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
3769392

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.49

PACKAGING NET WEIGHT
0.49

PACKAGING WEIGHT UNIT
KGM

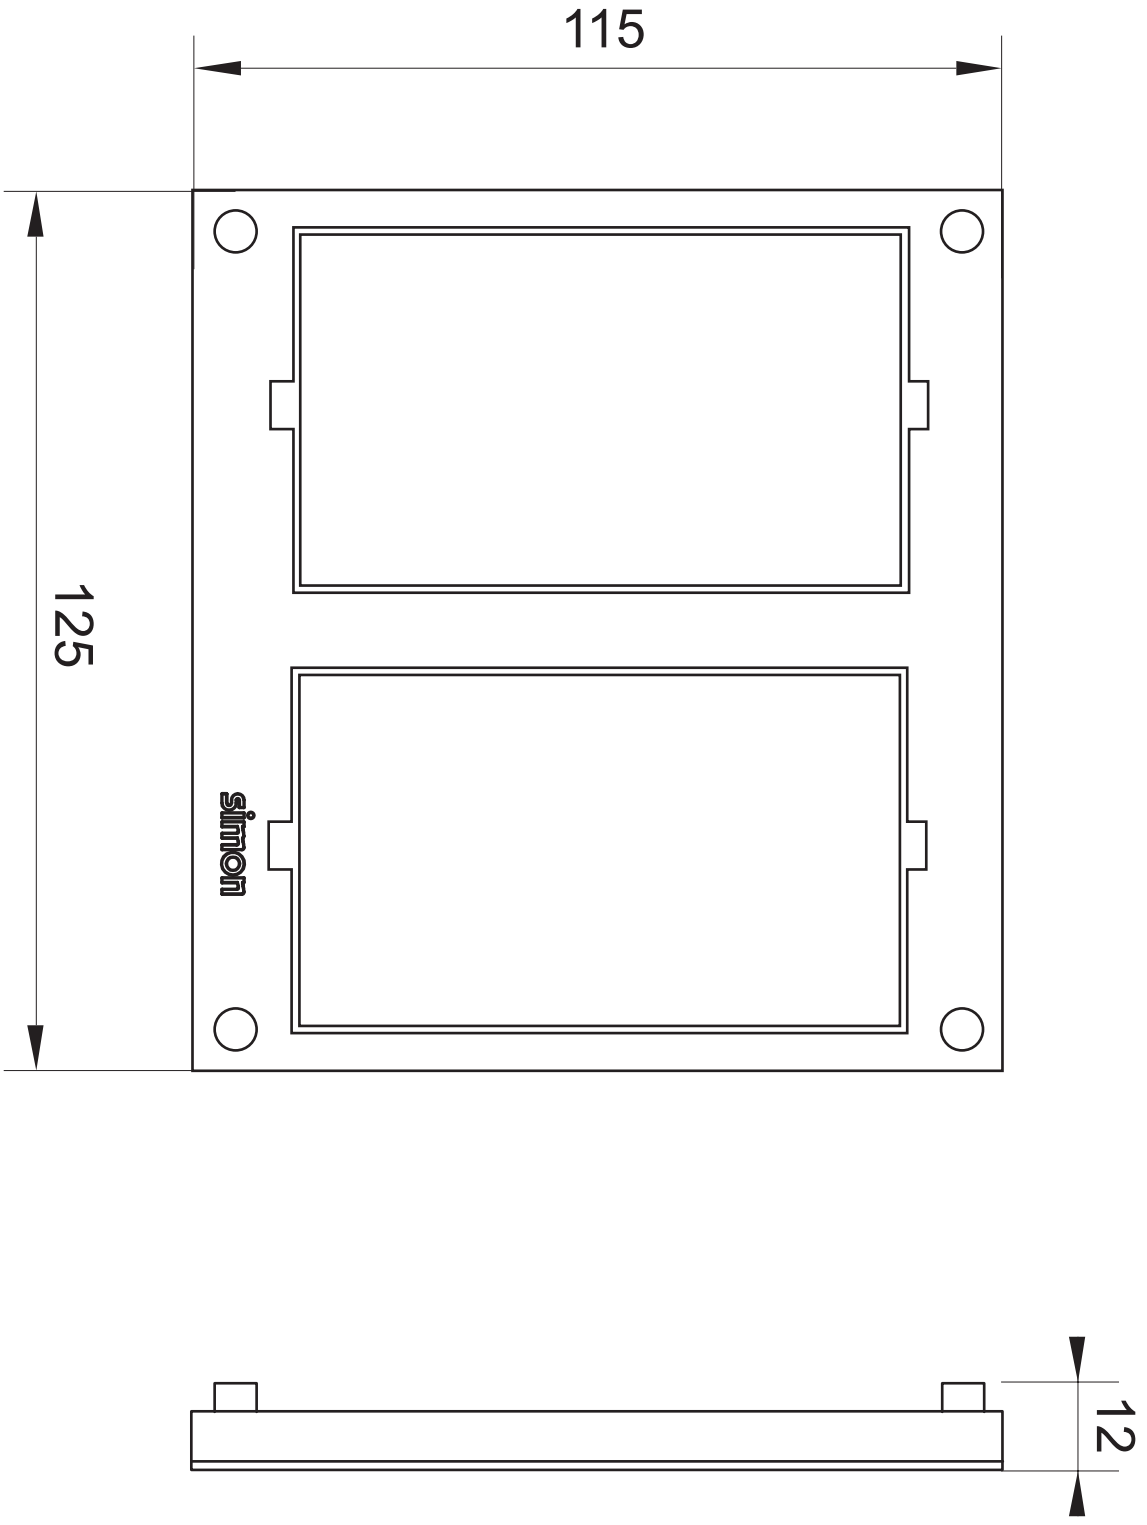
115
125
simon
12