

2-wire phase-cut dimmer switch 230 V~ matt black Simon 270

REF. 20000313-098



BASIC INFORMATION

FINISH

Matt black

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000025

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Dimmer switch and instruction sheet

REMARKS

It has a potentiometer for adjusting the minimum dimming level for the lamps.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LATCH TYPE

Electric

POWER SUPPLY (V~)

230 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

9005

FREQUENCY

50 - 60 Hz

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053282977

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053282977

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.124

UNITARY PACKAGING GROSS
WEIGHT

0.124

PACKAGING LENGTH


55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.124

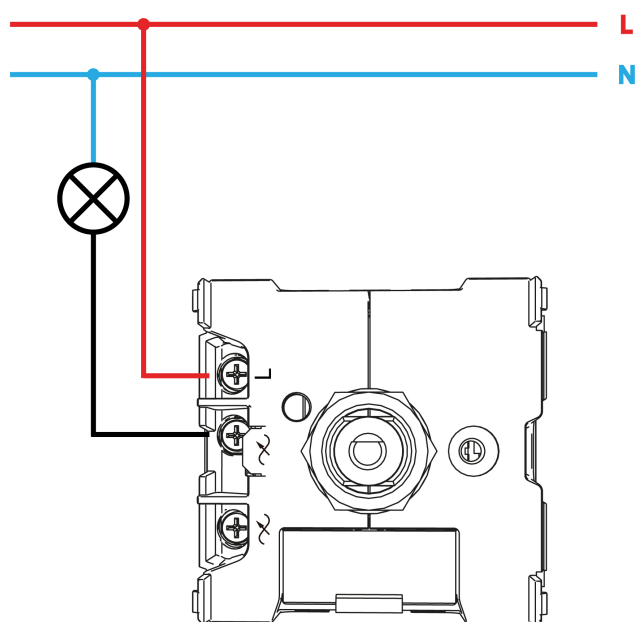

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet