French double socket outlet 16A 250V~ with safety device, 1Click® terminal connection. and unlocking pin red Simon 500 Cima

REF. **50000469-037**



BASIC INFORMATION

DESCRIPTION

This double French socket outlet 16A 250V~ consists of safety device, click terminal connection and unlocking pin. It is red colour and is included in the Simon 500 Cima series. The system click terminal connection 1 click has been a revolution in this collection, which makes installation and reduce the times, do not be necessary to strip cables. This article is appropriate for surface and flush mounting and has been manufactured in compliance with the regulations in force. It has metallic components with thermoplastic insulation. It is a material and self-extinguishing halogen-free that ensures maximum protection in case of fire, as prevents extend the fire and reduce the toxicity of smoke. Measures 100x50 mm and has a depth of 46 mm For maintenance, simply clean the product with a soft and dry cloth avoiding abrasive cleaners containing chlorine.

FINISH

Red

PACKAGING CONTENTS

Double socket outlet with cover and installation manual

ETIM CLASS

EC000125

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The article includes the pins for unlocking the security shutters

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

FORMAT
French

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INDICATOR FUNCTION
No

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes, using accessory 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to 60 °C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
2

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RAL
3002

NUMBER OF SOCKETS
2

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
0

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.111

PRODUCT NET WEIGHT
0.111

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097397

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
112

PACKAGING WIDTH
117

PACKAGING LENGTH
269

PACKAGING MEASUREMENT UNIT
MMT

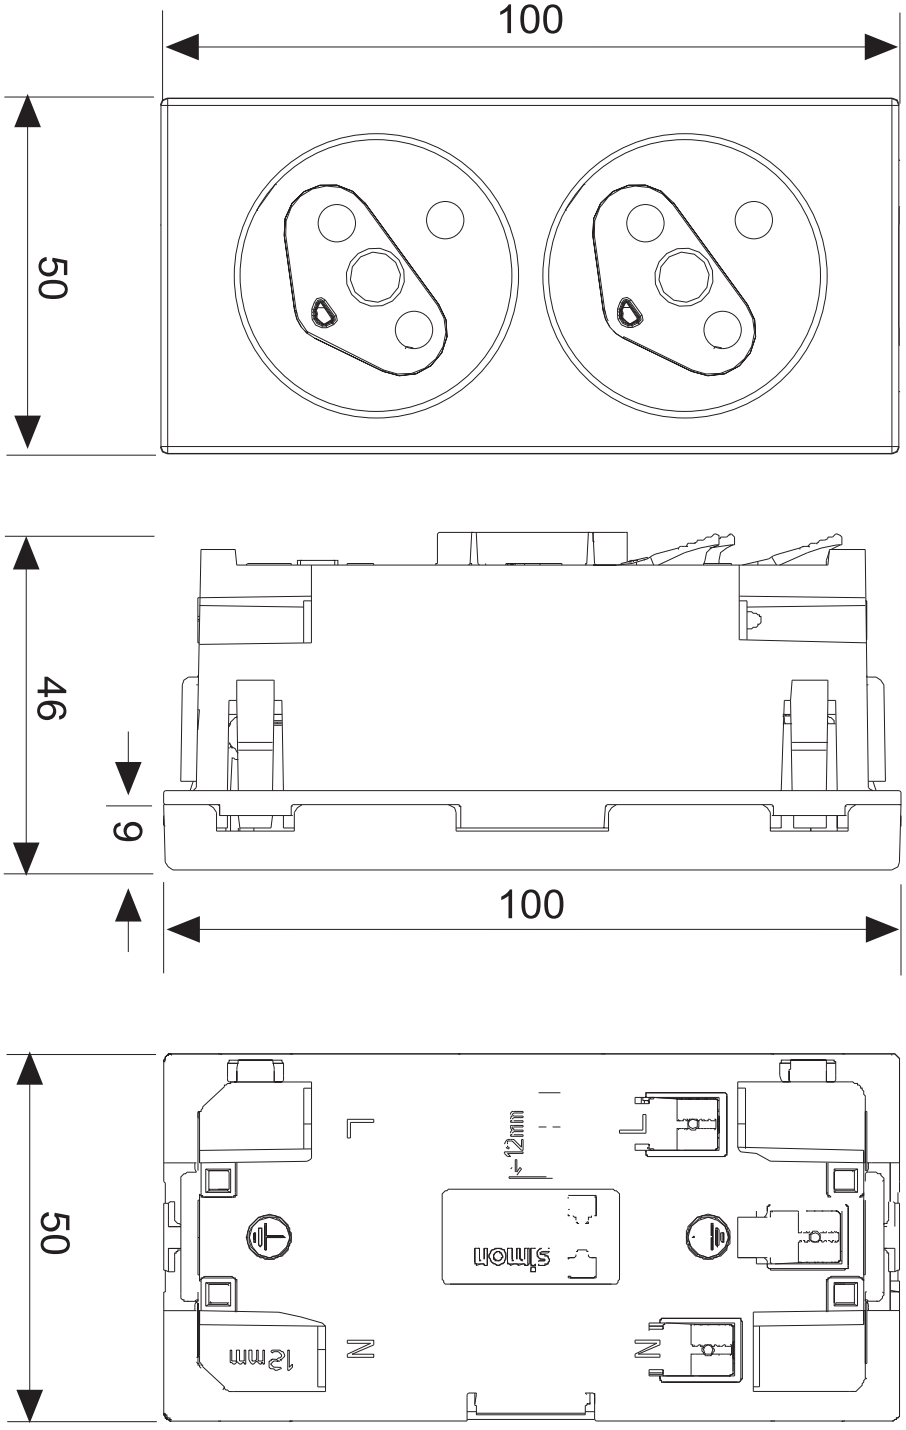
PACKAGING VOLUME
3.525

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.11

PACKAGING WEIGHT UNIT
KGM


100
50
46
9
100
50
12mm
L
N
N
12mm
simon