

Socket 2P+E with safety 15A 127V graphite Simon 25 Plus

REF. 25422-38



BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

15 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127/220 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

22.2

UNITARY PACKAGING GROSS
WEIGHT

26

PACKAGING LENGTH

224

UNITARY PACKAGING WIDTH

39.3

PRODUCT NET WEIGHT

26

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING LENGTH

41.2

UNITARY PACKAGING WEIGHT
UNIT

GRM

PACKAGING VOLUME

0.857

UNITARY PACKAGING
MEASUREMENT UNIT

MMT

PACKAGING EAN

7506020301132

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.036

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.52

UNITARY PACKAGING VOLUME
UNIT

DMQ

PACKAGING HEIGHT

45

PACKAGING NET WEIGHT

520

PACKAGING WIDTH

85

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


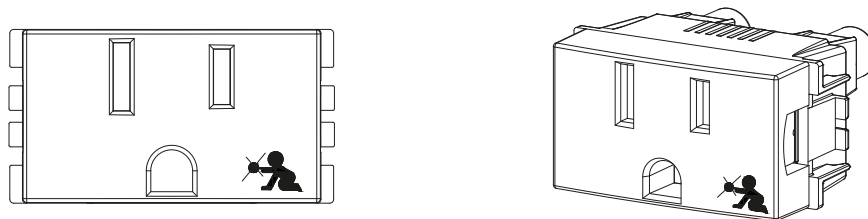


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

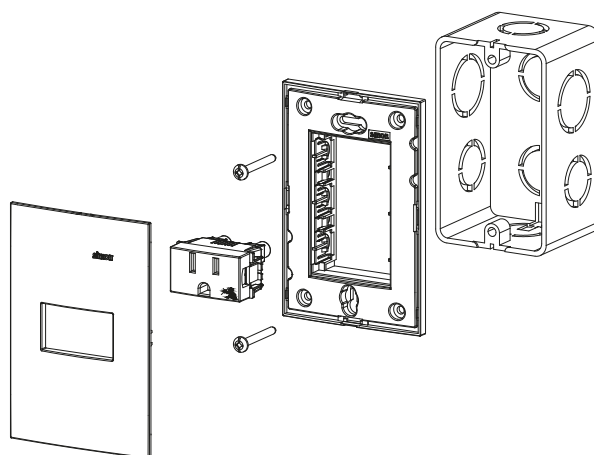