


Intermediate switch 10 AX 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75254-39

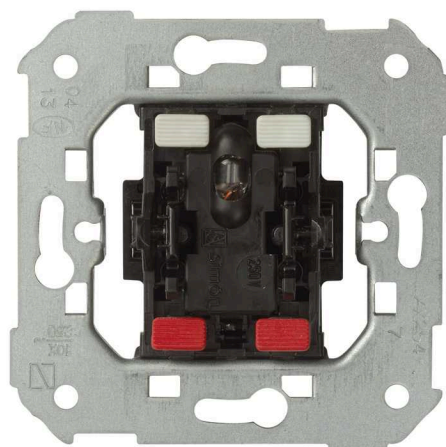

BASIC INFORMATION

DESCRIPTION

This Intermediate Switch of 10 AX and 250V~ probably belongs to one of the best control mechanisms, featuring an integrated light indicator and a quick terminal connection system from Simon 75. For its installation, it will be sufficient to press or place it on the surface, the acceptable cable section is from 1.5 to 2.5 mm and it comes with 11 mm of stripped cable. The material is based on metallic components with halogen-free thermoplastic insulation, capable of operating between 5 and 40°C, and can withstand a maximum of between -25 and 50°C. This item fully complies with the UNE-EN 60669-1:2002 + A1:2003 + A2:2009 standard.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 AX

RECESS DIMENSION (MM)

40

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF CONTACTS

4

LINKABLE

No

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

FREQUENCY

50 Hz

MONOBLOCK

No

NUMBER OF WIRES

4

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

REMOVAL OF COVER

Only with tool

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255940

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.064

PRODUCT NET WEIGHT

0.064

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003671

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.765

PACKAGING NET WEIGHT

0.64

PACKAGING WEIGHT UNIT

KGM

