
Set of 2 push-button switches for blinds 10A 250V~ with electrical latching system ivory Simon 27 Play

REF. **27332-32**

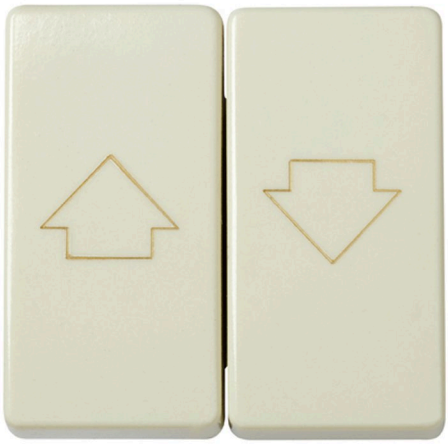

BASIC INFORMATION

DESCRIPTION

Controls the natural light in your room so intuitive and customized to each space with the group of 2 push buttons for blinds of Simon 27 Play. With finishes in ivory and engraving of the up / down blinds, makes this set of push buttons option is ideal for spaces where the innovation and functional lighting earn prominence. With a size of 45 x45 mm, it consists of two modules with tilting system integrated, and is compatible with a power of 250 Volts and intensity of 10 Amps and a cable section cross-section of up to 2.5 mm and stripping of 11 mm It is made of metal materials with halogen-free thermoplastic isolated, and thermoset trim for greater security in case of fire, to prevent the flame spread and toxicity by smoke. Designed for installation, recessed or surface-mounted, it is equipped with latching of security, to prevent the simultaneous actuation

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rockers

ETIM CLASS

EC000044

REMARKS

Mechanism fitted with security latching to prevent simultaneous operation.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
10 A

IP RATING
IP20

LATCH TYPE
Electric

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
895125

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.053

PRODUCT NET WEIGHT
0.053

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053071717

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
155

PACKAGING WIDTH
55

PACKAGING LENGTH
105

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.895

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.265

PACKAGING NET WEIGHT
0.265

PACKAGING WEIGHT UNIT
KGM