
Voice and data flat plate without dust cover and 1 element with 1 RJ45 connector category 6 UTP white Simon K45

REF. **K096U/9**

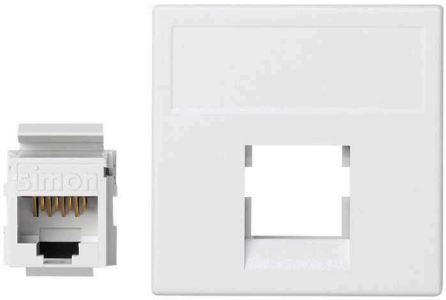

BASIC INFORMATION

DESCRIPTION

Simon works to improve connectivity in its operations, so that every product is designed so that you can find the most appropriate and increasingly simple in its installation, guaranteeing a perfect connectivity. Its equipment allows the incorporation of the protection elements Range of our complete Security. All information is sent and received safely, due to the constant separation of electrical cables and Voice, Data and Multimedia cables, thus eliminating electromagnetic interference and possible transmission errors. Connectors and plates for voice and data connections. Flat voice and data plate without dust cover with 1 RJ45 connector category 6 UTP for 1 element Simon K45 white. Category 6 UTP, Keystone I, II, ATT ® / Avaya ®. Finish Snow White. With insertion tool. Plate with 1 and 2 RJ45 connectors. When combining the voice and data plate in vertical housing (mini columns, columns, Teleblock, mechanism holder trunking) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position. Dimensions 45 x 45 mm x 8.5 mm Metal components with halogen-free thermoplastic self-extinguishing and halogen-free; guarantees no flame propagation in case of fire and low toxicity in case of smoke. Suitable for surface mounting and flush mounting. Resistant to corrosion and to extreme temperatures (-5 to +60 ºC + 60 ° C), clean with a soft, dry cloth, do not use abrasive cloths and / or abrasive cleaners containing chlorine.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover, RJ45 category 6 UTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 6 UTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Flat

RAL
9003

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
147206

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.24

PRODUCT NET WEIGHT
0.24

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436031999

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.29

PACKAGING NET WEIGHT
2.4

PACKAGING WEIGHT UNIT
KGM