
Flush-mount wall box for 4 double elements Simon 500 Cima

REF. **51020104-039**

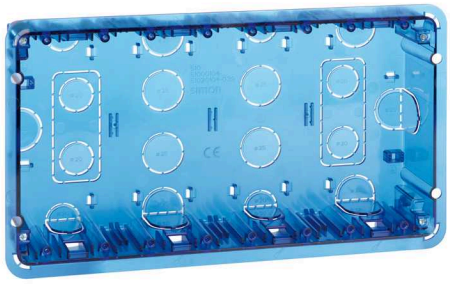

BASIC INFORMATION

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

PACKAGING CONTENTS

Flush-mount wall box, protective cover for box, metal partition wall and film for covering the pre-punched items on the box

ETIM CLASS

EC002601

REMARKS

The flush-mount box can be used as a template during installation thanks to the guides for marking the perimeter of the box

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
1, 2, 3, 4 and 6 double elements

NUMBER OF CLAMP-HOLDER HOLES
14

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION
2

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
8

NUMBER OF PRE-PUNCHED HOLES 30 X 70 MM
2

RECESS DIMENSION (MM)
262 x 141 mm

NUMBER OF SIDE ENTRANCES
2

VERSION
4 double elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 4 and 30 mm

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the claws included in the enclosure, in combination with aggregates, binders, additives, etc.

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for flush mounting on the wall

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053091876

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.305

PRODUCT NET WEIGHT
0.305

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053091876

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
50

PACKAGING WIDTH
165

PACKAGING LENGTH
285

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
2.351


PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0


PACKAGING NET WEIGHT
0.305

PACKAGING WEIGHT UNIT
KGM

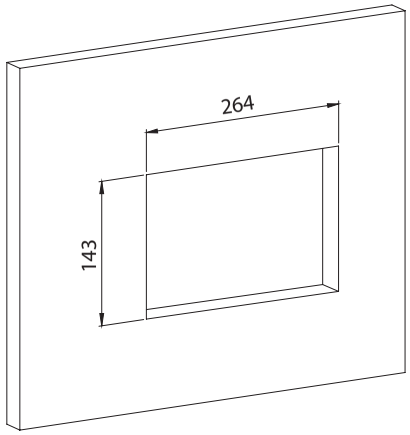




Tabique obra



Tabique hueco

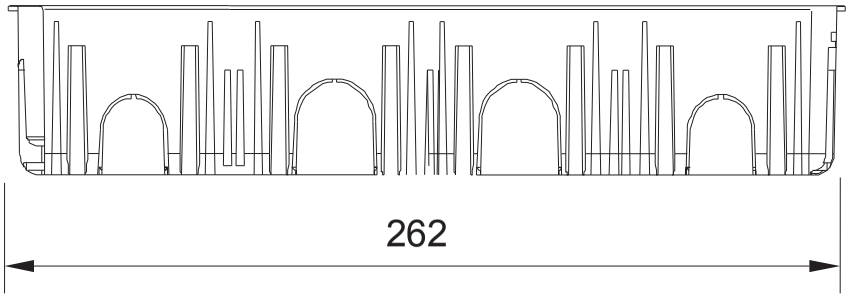

•Grosor pared de 4 a 30mm

