
Framework for 8 elements in adjustable floor box graphite Simon 500 Cima

REF. **52051804-038**

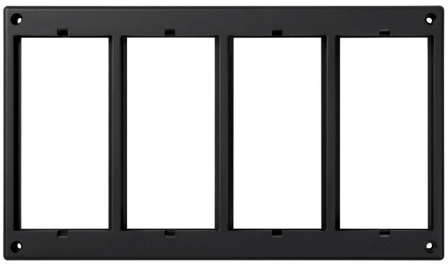

BASIC INFORMATION

DESCRIPTION

The Simon 500 Cima series offers this kit shallow floor box for 4 elements with 1 double Schuko plug and 2 plates for 1 RJ45 suitable to be installed in raised garden and flooring. Compatible with elements up to 250 Volt voltage and 16 Ampere current, the piece measures 252x180x69 mm and grey finishes in tone. It also allows the insertion by cutting (1 click ®. And thanks to its composition is guarantees that the flame spread if jump is not a fire, in addition to a very low toxicity in case of smoke optionally you can be combined with the flush-mount trim cover if you do not install the same floor covering. From Simon we think always in our customers, so we make sure to offer the highest quality and guarantee at all times. And in our collection Simon 500 Cima is the test of this thanks to the fact that brings together the safest mechanisms on the market.

FINISH

Graphite

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework in a white finish. It is recommended to combine this product with the graphite-finish adjustable floor boxes.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

8 modules

RAL

7021

VERSION

8 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254868

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.089

PRODUCT NET WEIGHT
0.089

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093351

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
95

PACKAGING WIDTH
135

PACKAGING LENGTH
230

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
2949750

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.445

PACKAGING WEIGHT UNIT
KGM

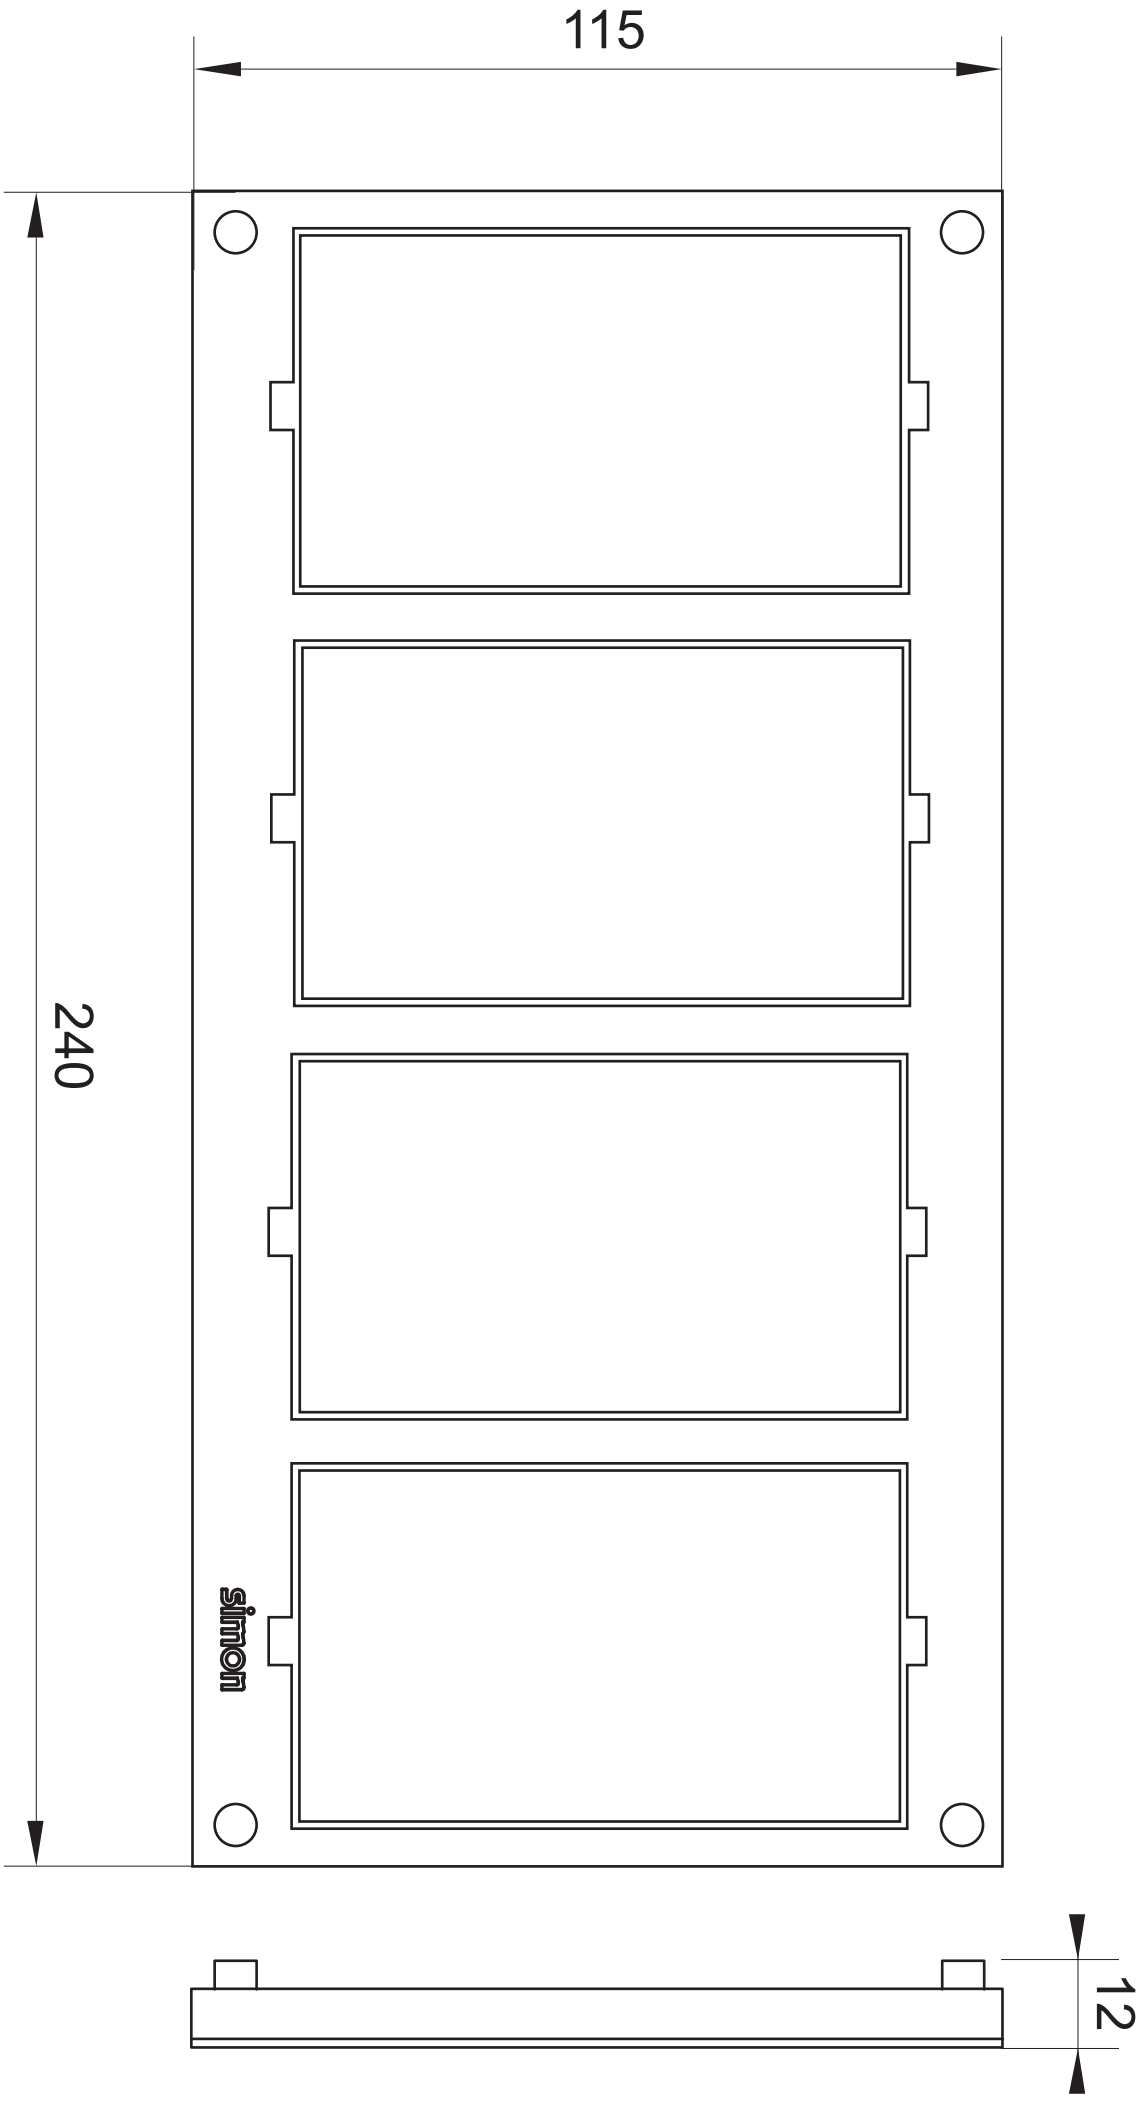
115
240
simon
12