


Two-way switch 16 AX 250V~ with quick terminal connection Simon 75

REF. 75211-39

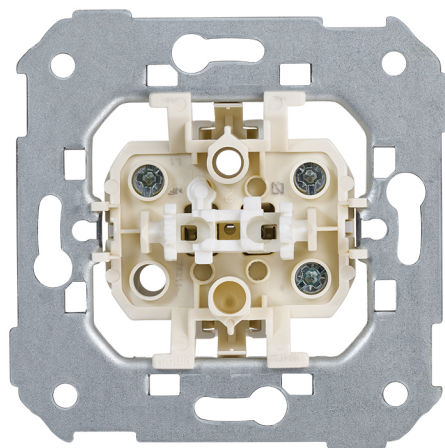

BASIC INFORMATION

DESCRIPTION

Switch with a current of 16 AX and a power of 250 V~ which does not include a luminous signal pilot but does add a quick terminal connection system belonging to the Simon 75 range and available in the "control mechanisms" category. It also features a tilting operating type. It is possible to implement the signaling function through a signaling support and a key with a viewer. They are compatible with the Simon 75 and 82 series. It is possible to terminate without stripping a single wire with the switch.

For installation, it is suitable for flush or surface mounting in universal mechanism boxes. Thanks to the manufacturing with metal components with thermoplastic insulation and halogen-free, it can comply with the UNE-EN 60669-1:2002 + A1:2003 + A2:2009 regulation, allowing its use within minimum temperature intervals of 5°C and a maximum of 40°C.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 13	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255872

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3017190

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.063

PRODUCT NET WEIGHT

0.063

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053025321

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3017190

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.63

PACKAGING NET WEIGHT

0.63

PACKAGING WEIGHT UNIT

KGM

