Electrical linker for 2 double socket outlets for installing in wall boxes and metal enclosure Simon 500 Cima

REF. **50000996-039**



BASIC INFORMATION

DESCRIPTION

Element electrical linker 50000996-039 version of the Simon 500 Cima series compatible for the installation of boxes wall-mounted, recess and metal enclosures. Allows a quick terminal connection and comfortable, facilitating the installation on all types of surfaces. It is a model designed in graphite finishes of colour. Allows you to link two socket outlets double without the need of cabling simplifying the sequences of electrical installations. Version of two modules compatible with any double socket outlet professional of the range of elements Simon 500 Cima. Model of dimensions 156 x 39.5 mm suitable for different diagrams. Integrated halogen-free insulation components with self-extinguishing thermoplastic minimising the risk in situations. Easy assembly and insertion phase, neutral and ground connection and coupling in installations, releasing the use of wire assembly allowing a professional, fast and secure.

FINISH

Graphite

MATERIAL

Various

COMPATIBILITY

Double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Electrical linker for two double socket outlets

ETIM CLASS

EC002498

REMARKS

This article is only compatible with Simon 500 Cima double socket outlets

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

IP RATING

IP20

KIT AVAILABILITY

Yes

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

VERSION

2 elements

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

By direct snap-fit of the linker (no tools needed) in the pins of the fast terminal connection system of both sockets (the part of the linker with 4 pins needs to be inserted first and then the other part as it already has a position)

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Suitable for installing in double socket outlets housed in wall enclosures or metal enclosures

REGULATIONS

REGULATIONS

UNE 20.315 / EN 60.998-2-3

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254608

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.013

PRODUCT NET WEIGHT
0.013

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053098196

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
81

PACKAGING WIDTH
92

PACKAGING LENGTH
162

PACKAGING MEASUREMENT UNIT
MMT

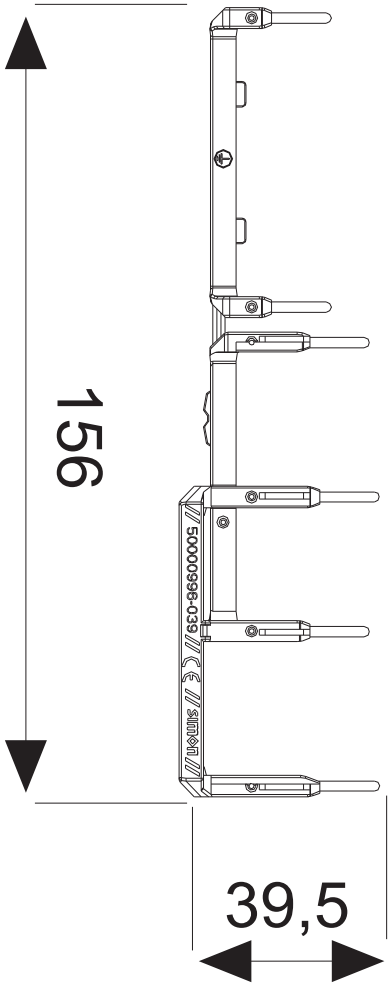
PACKAGING VOLUME
1.207

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.26

PACKAGING NET WEIGHT
0.26

PACKAGING WEIGHT UNIT
KGM


156
39,5