Cover for mechanism of the German double socket outlet with viewer red Simon 500 Cima

REF. **50011841-037**



BASIC INFORMATION

DESCRIPTION

Model for cover socket 50011841-037 for the Simon 500 Cima series, presents mechanism for socket outlets Schuko format. Element for electrical installations of two modules of colour and finishes in red. It is a piece of easy assembly compatible for all kinds of surfaces and environments. Designed for its combination with a double Schuko socket outlet, has a signaling function thanks to the integration of a viewer of brightness and reddish tone. Manufactured with thermoplastic components halogen-free minimising the risk in situations of fire and smoke. It measures 100 x 50 x 9 mm and a depth of 9mm suitable for different installations and jobs. With this cover socket is easy assembly and coupling of the outlets, integrating the maximum values of protection and security certification professionally.

FINISH

Red

MATERIAL

Plastic

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for the mechanism of the German double socket outlet with viewer without LED light indicator

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT
Schuko

INDICATOR FUNCTION
Yes

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
2

RAL
3002

VERSION
2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053421598

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093580

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

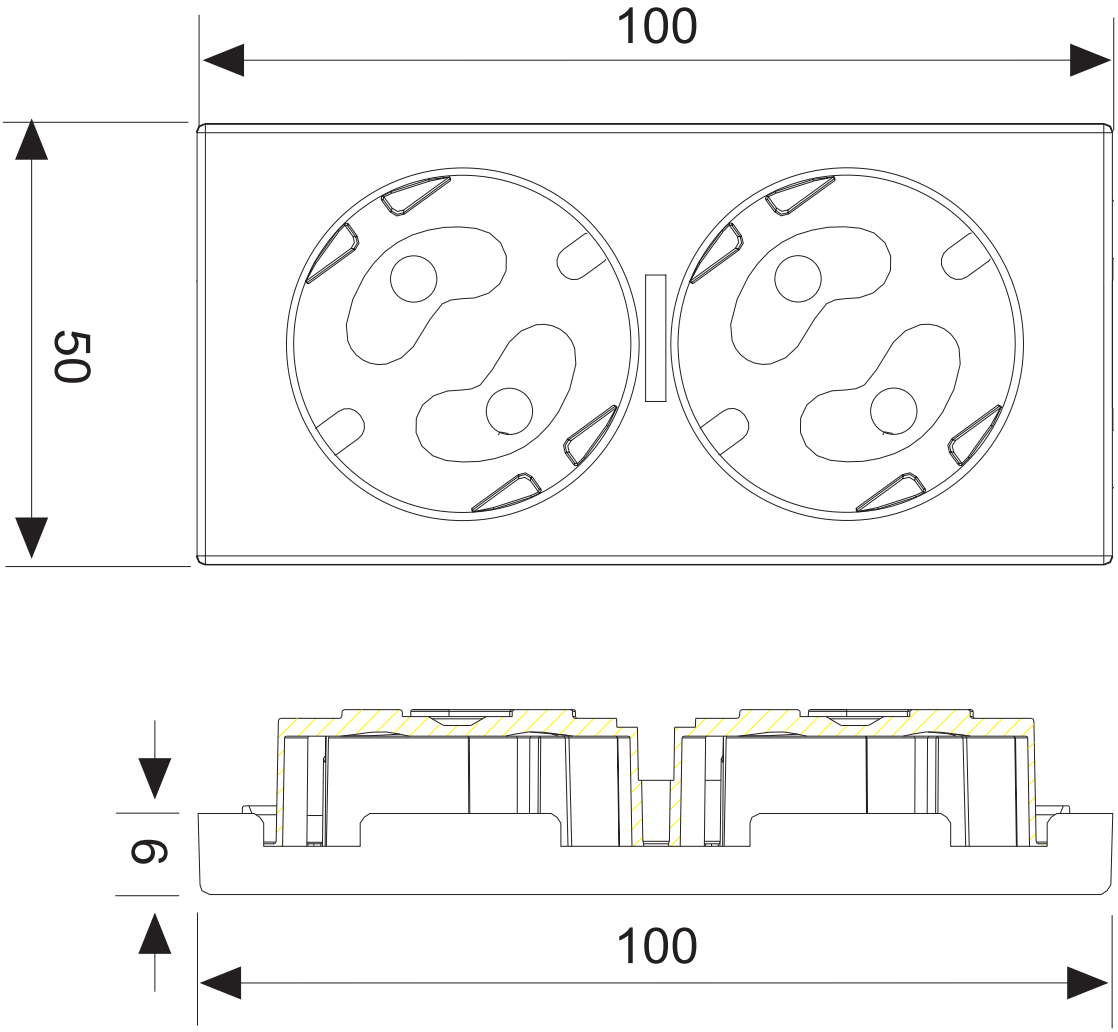
PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


100
50
6
100