


HDMI 2.0 4K connector + USB 2.0 type A connector bronze Simon 270

REF. 20000095-097

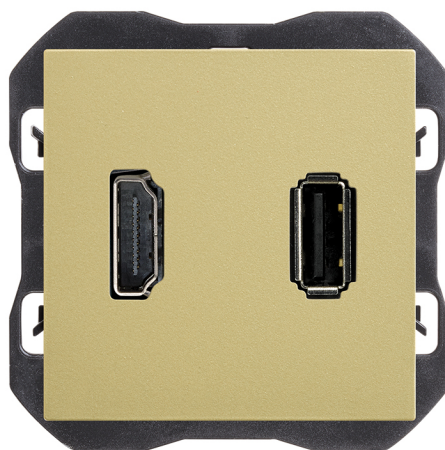

BASIC INFORMATION

DESCRIPTION

HDMI 2.0 4K connector with USB 2.0 type A connector from the Simon 270 series, combining high-definition audio and video connection with a USB data port in a single mechanism. A signal amplifier is required for longer distances. Made of thermoplastic, it measures 45 x 45 mm. Suitable for flush mounting in a universal back box, in a horizontal position. Protection rating IP20. Operating temperature range: 5 to 45 °C. Storage temperature range: -25 to 50 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Bronze

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC002906

MATERIAL

Thermoplastic

PACKAGING CONTENTS

HDMI connector + USB connector, cover and instruction sheet

REMARKS

A signal amplifier is required for greater distances. The length of the cable will depend on the type of emission (full HD, 3D...).

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE 12V AC/DC

No

COMPATIBLE 230V AC/DC

No

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

REVISION

2.0

CONNECTOR TYPE

HDMI + USB

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

HDMI,USB

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

RAL

3033

RECESS DIMENSION (MM)

35

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

USB PORT TYPE

A

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Horizontal

INSTALLATION TYPE

Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Feed-through connector, screw

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053284131

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053284131

PACKAGING VOLUME

0.242

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.05

UNITARY PACKAGING GROSS
WEIGHT

0.05

PACKAGING LENGTH


55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.05

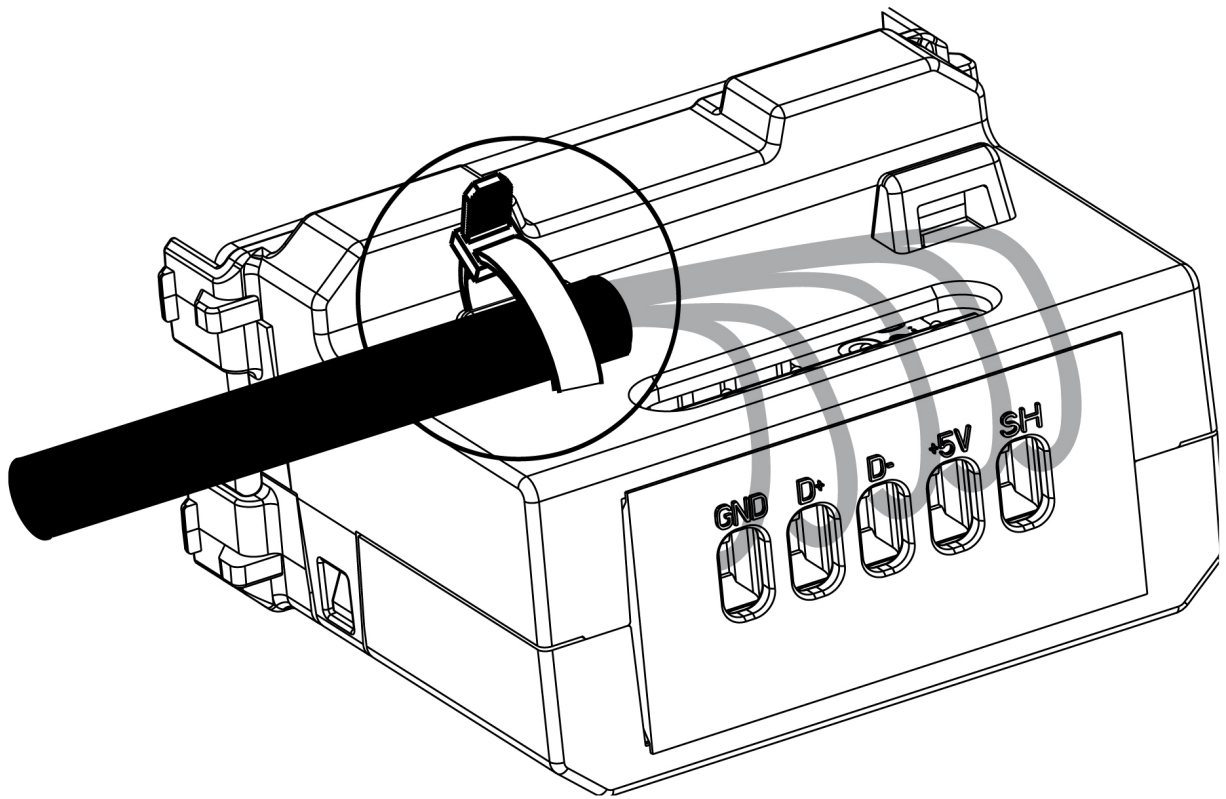

GND - 

D +

D -

R - Derecha / Direita / Droit / Right

+5V - VBUS (5V)

SH - Malla /Shell

