Thermostat gloss white Simon 100

REF. **10000810-130**



BASIC INFORMATION

FINISH
Gloss white

PACKAGING CONTENTS
Mechanism and instructions

ETIM CLASS
EC003263

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
5 A

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Touch

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

POWER SUPPLY (V~)
127/230 V~

STORAGE TEMPERATURE RANGE (°C)
-25 - 75 °C

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053201763

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.285

PRODUCT NET WEIGHT
0.285

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053201763

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
105

PACKAGING LENGTH
127

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1000125

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.285


PACKAGING WEIGHT UNIT
KGM



Instalación centralizada para caldera/bomba de calor
Centralized installation for boiler/heat pump

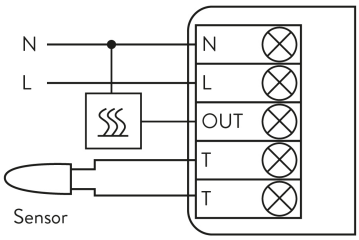

Instalación suelo radiante eléctrico
Installation with electric floor



Instalación zonificada a 230V con contacto Normalmente Abierto
230V installation with Normally Open contact

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet