


**Mechanism-holder unit IP66 with safety lock and Italian
socket P40 socket outlet with 1 RJ45 category 5e UTP
stainless steel Simon K45**

REF. KSE35USEC/23/72

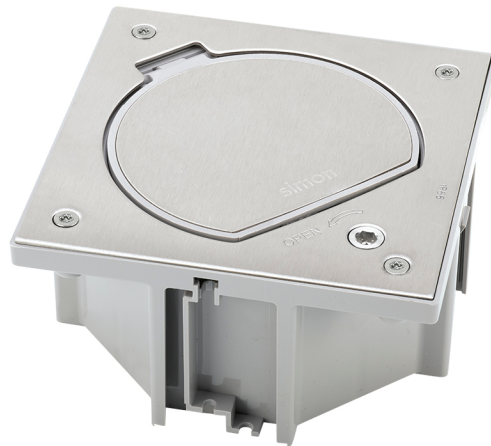

BASIC INFORMATION

DESCRIPTION

The mechanism-holder unit unit with security and Italian P40 socket outlet with an RJ45 connector of category 5e UTP in stainless steel with dimensions of 130 x 130 x 55 mm, a current of 16 A and a voltage of 250 V ~. It also supports a wire cross section of 1.5 to 2.5 mm and it has a stripped wire 12 mm his structure has been made with mechanism-holders of AISI 304 stainless steel on self-extinguishing thermoplastic baseboard and halogen-free; guarantees no flame propagation in case of fire and low toxicity in the event of smoke generation. Its design allows incorporation in any type of floor, be it a raised or concrete floor floor, and by combining the tray in accordance with the type of installation, with a socket for standard current circuit, the cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel. With the range update, its equivalent for the new version is the KFH115USEC/72 reference.

FINISH

Stainless steel

MATERIAL

Stainless steel

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

1

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

DUST SHUTTER

No

CURRENT (A)

16 A

FORMAT

Italian

IP RATING

IP66

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333891

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.468

PRODUCT NET WEIGHT

0.394

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333891

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1445213

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.468

PACKAGING NET WEIGHT

0.394

PACKAGING WEIGHT UNIT

KGM