


Set of 2 push-button switches 10A 250V~ with built-in light and fast terminal connection system

REF. 75393-39

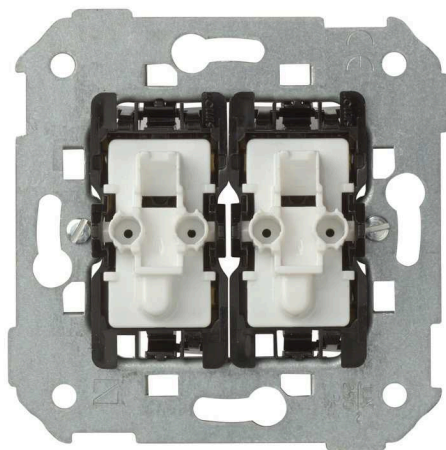

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)	CURRENT (A)	STORAGE TEMPERATURE RANGE (°C)
From 1,5 to 2,5 mm	10 A	-25 - 50 °C
CONSUMPTION INDICATOR (MA)	IP RATING	VERSION
1 mA	IP20	Double
NUMBER OF POSSIBLE ELEMENTS	TYPE OF MECHANISM	VOLTAGE (V~)
1 element	Pivoting	250 V~
INDICATOR FUNCTION	OPERATING TEMPERATURE RANGE (°C)	
Yes	5 - 40 °C	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX	TYPE OF TERMINAL CONNECTION - FUNCTION 1
15	Universal	Fast
CLAW	INSTALLATION TYPE	
Simon 27	Suitable for surface and flush mounting	

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053255988	UNITARY PACKAGING WEIGHT UNIT KGM	UNITS CONTAINED PACKAGING 10
UNITARY PACKAGING GROSS WEIGHT 0.073	UNITARY PACKAGING WIDTH 0	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING HEIGHT 0	PACKAGING EAN 8421053036617	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING GROSS WEIGHT 0.725	PACKAGING VOLUME UNIT MMQ
PRODUCT NET WEIGHT 0.073	PACKAGING HEIGHT 82	PACKAGING WEIGHT UNIT KGM
UNITARY PACKAGING VOLUME 3026595	PACKAGING LENGTH 223	PACKAGING WIDTH 165
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING NET WEIGHT 0.73	