Flat voice and data plate without dust cover for 1 RJ45 Nexans® for 1 element graphite Simon 500 Cima

REF. **50018185-038**



BASIC INFORMATION

DESCRIPTION

500 CIMA is the Simon series designed to provide solutions in any space professional for any type of connection has solutions for wall, by means of mechanisms to be recessed or surface-mounted; solutions for shallow floor, with or mini-towers; and solutions for open-plan areas or suspended ceilings. Always guaranteeing more high speed data transmission thanks to their plates category 6. As this plate for voice and data connections. With flat form and finished in graphite, it has an element and RJ45 connector Nexans ®. The plate also includes a snap-fit to be able to install it in wrappers horizontal or vertical, if the need for adapter. It measures 50x50 and with a depth of 11mm. This plate is made with thermoplastic components halogen-free, ensuring that the fire and the smoke is not propagate in case of fire. Simon always ahead of the functionality, design and security.

FINISH

Graphite

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Nexans® LANmark®-5 EVO, LANmark®-6 EVO.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
RJ45 Nexans® connectors

SNAP-FIT TYPE
RJ45 Nexans® connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.025

PRODUCT NET WEIGHT
0.025

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097052

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
54

PACKAGING WIDTH
52

PACKAGING LENGTH
215

PACKAGING MEASUREMENT UNIT
MMT

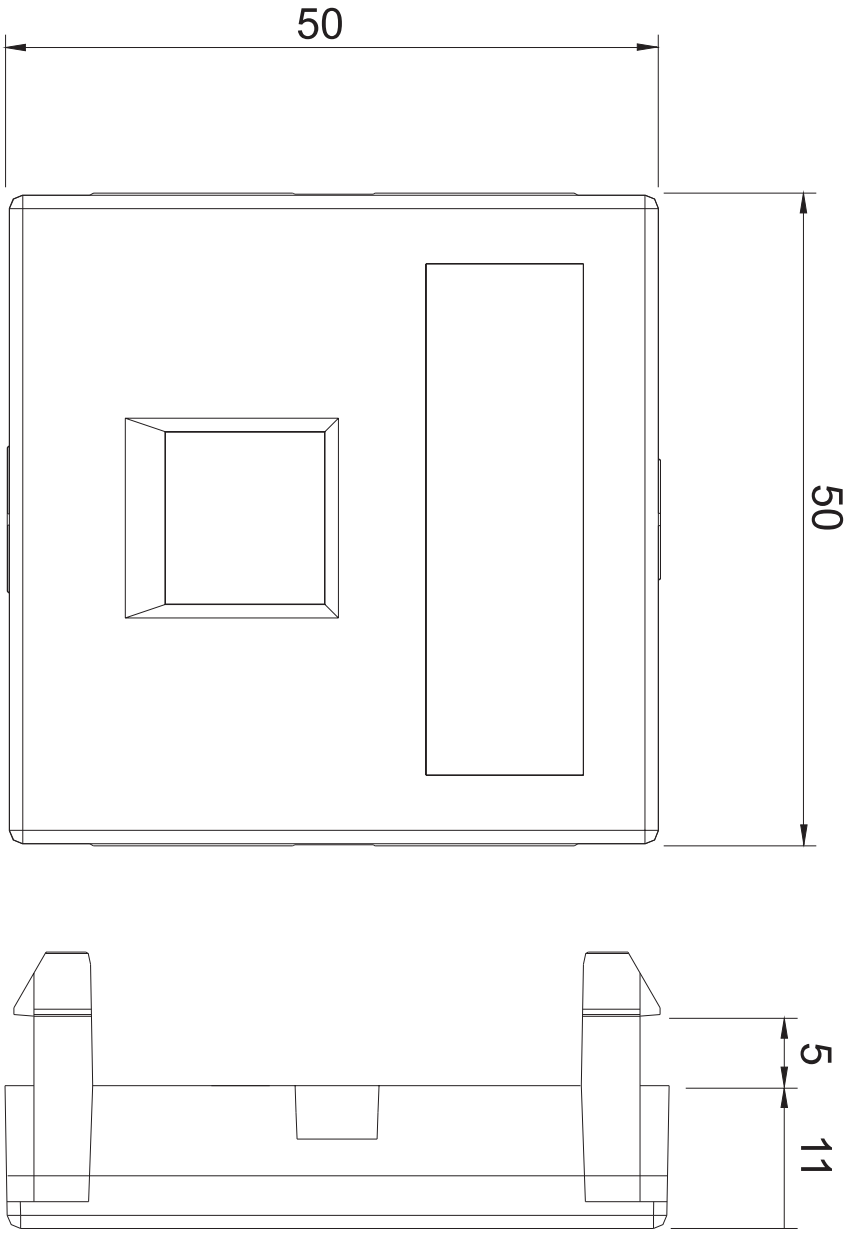
PACKAGING VOLUME
0.604

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.25

PACKAGING WEIGHT UNIT
KGM


50
50
5
11