
Depth expander 3 double elements for surface or flush-mount wall box aluminium Simon 500 Cima

REF. **51030903-033**

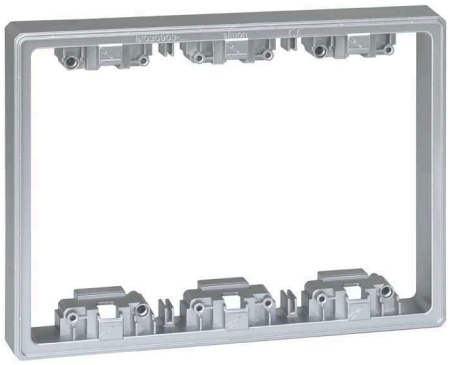

BASIC INFORMATION

FINISH
Aluminium

MATERIAL
Plastic

COMPATIBILITY
Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

PACKAGING CONTENTS
Depth expander, metal partition wall and installation manual

ETIM CLASS
EC002328

REMARKS
The depth expander ensures the perfect fit of all categories of RJ45 connectors on the market in combination with flat voice and data plates.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
3 and 4 double elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60 ºC in surface-mount wall installation and +90 ºC in flush-mount wall installation

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the selected wall enclosure.

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
6

RECESS DIMENSION (MM)
141 x 199 mm (* para instalação encastrada na parede)

VERSION
3 double elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for flush mounting or surface mounting onto wall in combination with the corresponding enclosure

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053092194

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.278

PRODUCT NET WEIGHT
0.278

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053092194

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
52

PACKAGING WIDTH
165

PACKAGING LENGTH
225

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1.93

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.278

PACKAGING WEIGHT UNIT
KGM

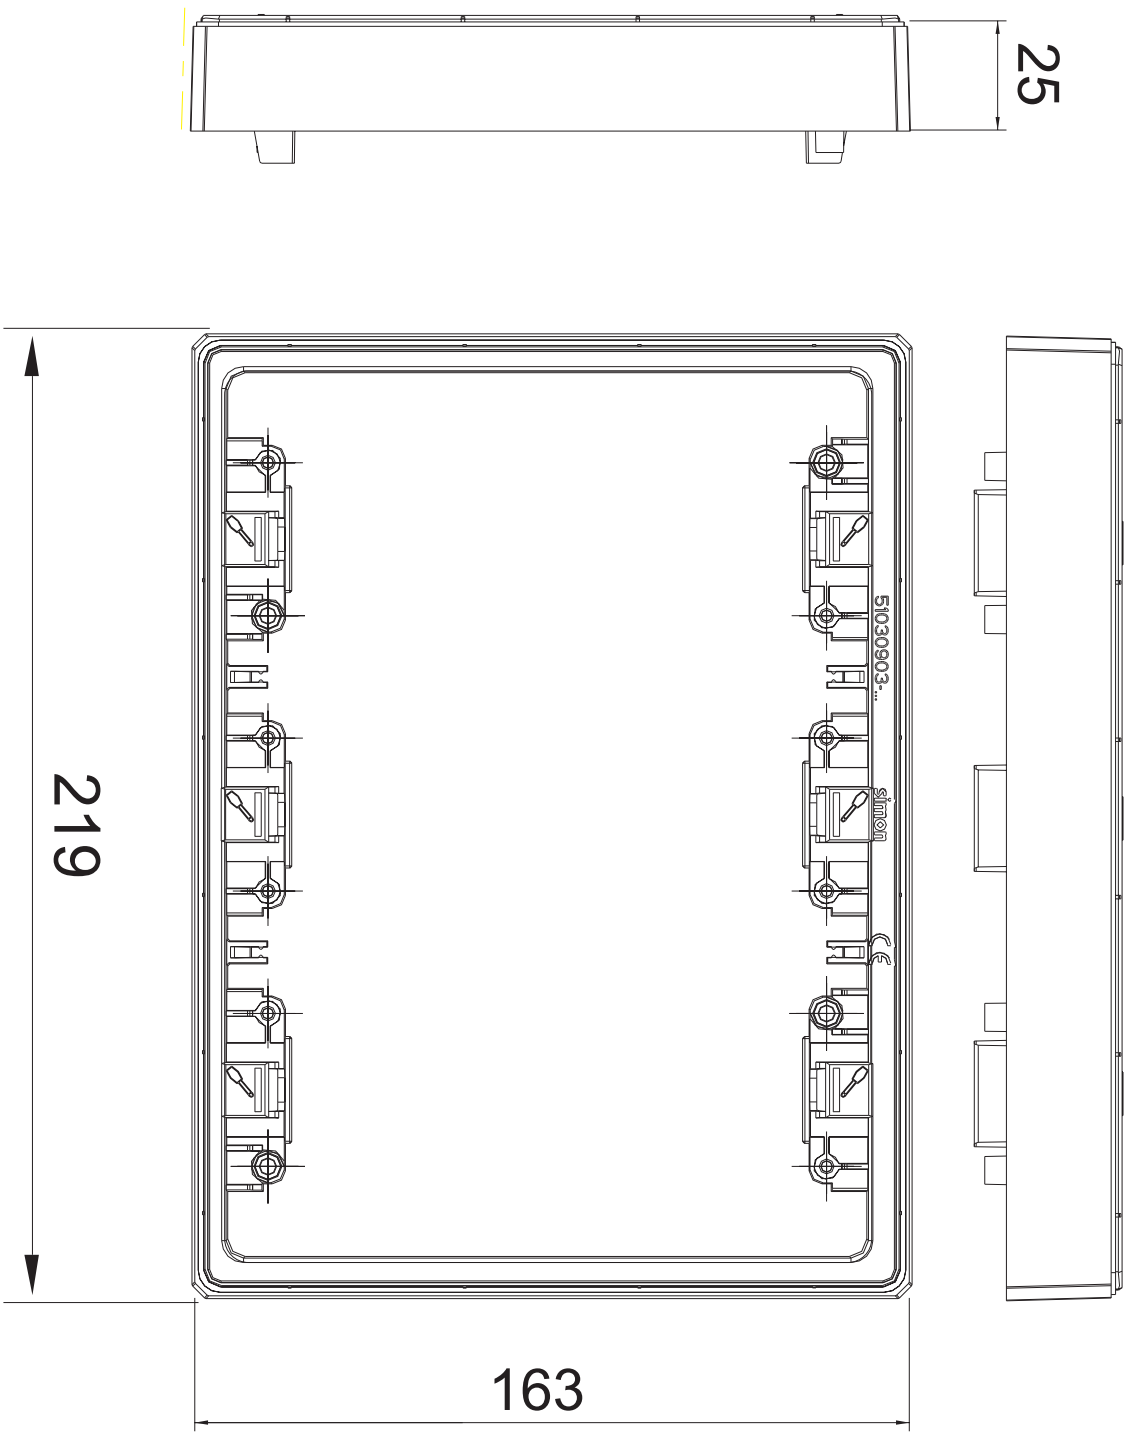
25
219
163
51030903-...
simon