


## Flush-mount trim cover for adjustable floor box or service cover 2 elements grey Simon 500 Cima

REF. 52053101-035

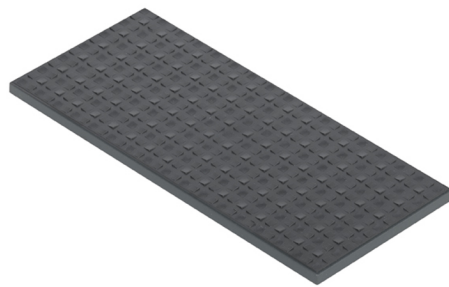

## BASIC INFORMATION

### DESCRIPTION

Designed exclusively for installation in raised floor box kit, our 8 elements for adjustable floor comprising 2 double socket socket for standard current circuit and 1 double UPS (uninterruptible power supplies) for stable current circuit and 2 plates for 2 RJ45 is part of the Simon 500 Cima series. This piece measures 187x283x92 mm and finishes in grey, insertion by cutting (1 click ® and is compatible with elements up to 250 Volt voltage and 16 Ampere current. Also, it consists of metal components with thermoplastic insulation coated self-extinguishing halogen-free to ensure no flame spread in case of fire notional in the event of a fire, in addition to a very low toxicity in the event of smoke generation. Thanks to our commitment to offer the best quality at a constant innovation in its products, the collection Simon 500 Cima manages to assemble all kinds of solutions for those who are looking for the best mechanisms functional on the market, which offer to turn the greater security.

### FINISH

Grey

### PACKAGING CONTENTS

Trim cover

### MATERIAL

Plastic

### ETIM CLASS

EC002417

### REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### IK CLASSIFICATION

08

### TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

### AVAILABLE IN

2, 4, 6, 8 and 12 elements

### INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

### NUMBER OF MODULES

2 modules

### DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

### IP RATING

IP4X

### RAL

7011

### MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

### KIT AVAILABILITY

No

### VERSION

2 elements

### HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COVER

Only with tool

### TYPE OF FASTENING

Using the screws supplied

### INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

### EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### INSTALLATION DIRECTION

Horizontal, Vertical

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT  
0

UNITARY PACKAGING WEIGHT  
UNIT  
KGM

PACKAGING MEASUREMENT  
UNIT  
MMT

UNITARY PACKAGING WIDTH  
0

PACKAGING EAN  
8421053101483

PACKAGING VOLUME  
1.714

UNITARY PACKAGING LENGTH  
0

UNITS CONTAINED PACKAGING  
10

PACKAGING VOLUME UNIT  
DMQ

UNITARY PACKAGING VOLUME  
0

PACKAGING HEIGHT  
70

PACKAGING GROSS WEIGHT  
0

UNITARY PACKAGING GROSS  
WEIGHT  
0.052

PACKAGING WIDTH  
154

PACKAGING NET WEIGHT  
0.52

PRODUCT NET WEIGHT  
0.052

PACKAGING LENGTH  
159

PACKAGING WEIGHT UNIT  
KGM

