

Basic metallic IP40 and IK10 box 2 German outlets with set of keys and combined auto-diff.circ. breaker C-Curve Class A 16A

REF. 0602102-039



BASIC INFORMATION

FINISH

Aluminium

COMPATIBILITY

Simon 500 CIMA mechanisms

PACKAGING CONTENTS

Box and instruction sheet

APPLICATION

Residential

OPERATING ENVIRONMENT

Residential

REMARKS

Tests have been carried out with the German connector (EEC 7/4) to guarantee a charge of 8 hours a day with an intensity of 16A.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

16 A

POWER RANGE (KW)

3.6 kW

CABLE SECTION ADMITTED (MM)

2,5 to 6 mm

IP RATING

IP40

TYPE OF PROTECTION

Magnetothermal differential, overcurrent and short circuits

TYPE OF CONNECTION

External (via protected terminal connections)

TYPE OF LINE

Single-phase

STORAGE TEMPERATURE RANGE (°C)

25 - 70 °C

ELECTRICITY METER

No

OPERATING TEMPERATURE RANGE (°C)

-20 - 60 °C

TOLERANCE (%)

10

FREQUENCY

50 Hz

NUMBER OF OUTLETS

2

IK CLASSIFICATION

10

OPERATION OF THE OUTLET(S)

Simultaneous

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Suitable for surface mounting (4 bolts)

REGULATIONS

EV READY CERTIFICATION

No

ZE READY CERTIFICATION

No

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053129692

PRODUCT NET WEIGHT

2.82

PACKAGING LENGTH

0

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

0

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053129692

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING NET WEIGHT

2.82

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

0

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT


2.82

PACKAGING WIDTH


0

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

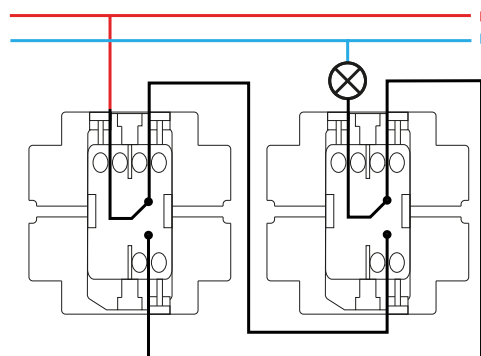


Conmutador / 2-way switch
XXXX201-XXX

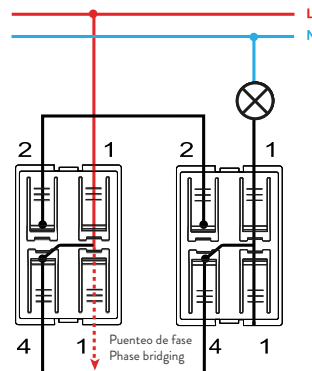


Conmutador / 2-way switch
7700201-039

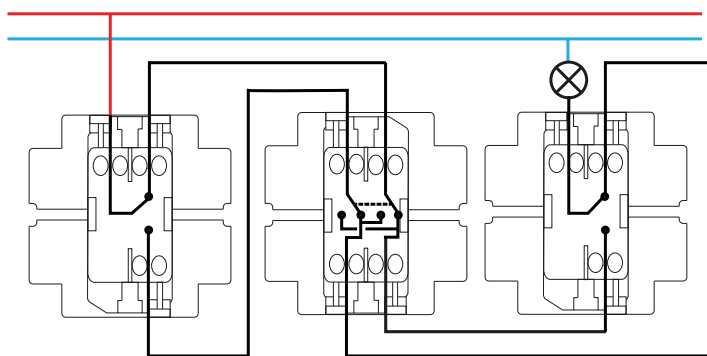


Conmutador cruce / Intermediate switch
XXXX251-XXX

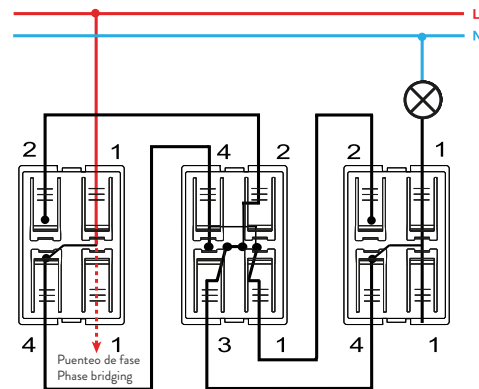


Conmutador cruce / Intermediate switch
7700251-039

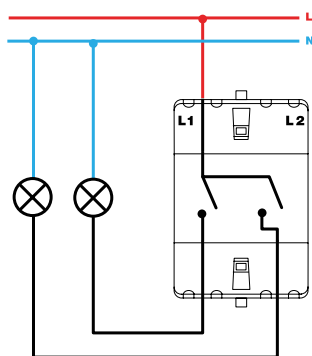


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

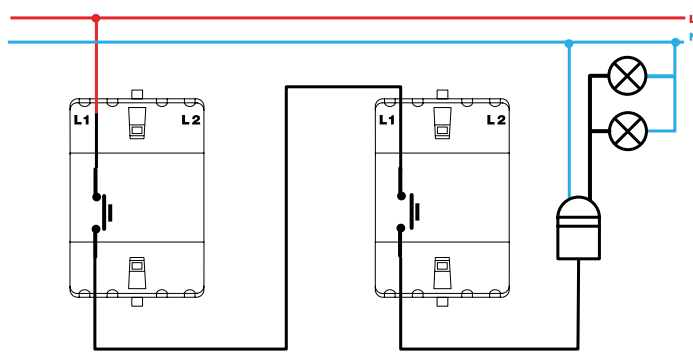


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

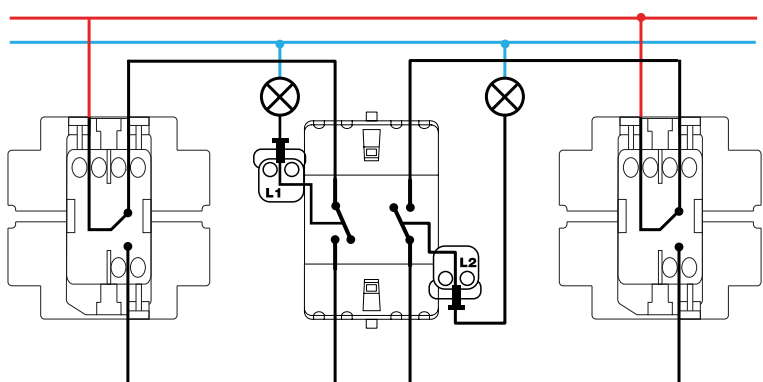


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

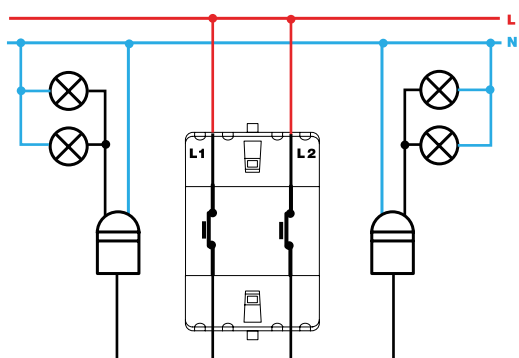


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

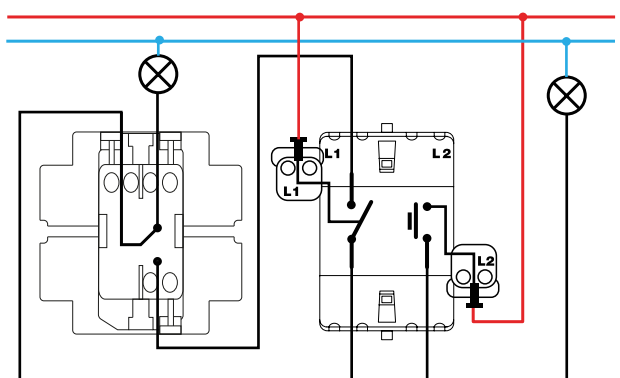


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

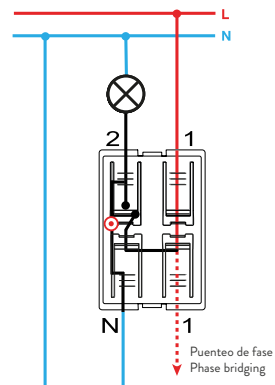


Interrupor con piloto / Push button pilot switch
7700112-039

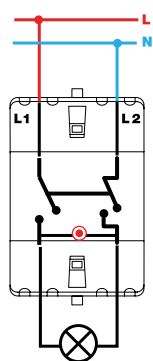


Interrupor bipolar / Double pole switch
XXXX134-XXX

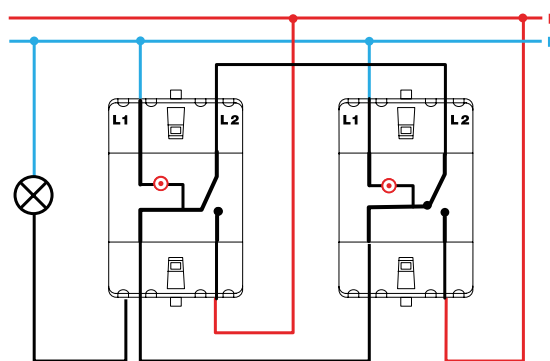


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

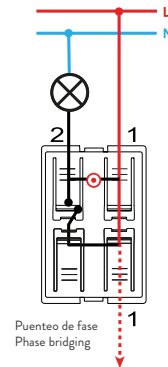

Pulsador con luminoso / Push button switch with light
7700160-039

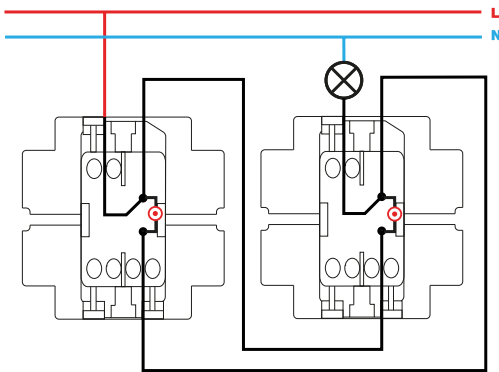

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

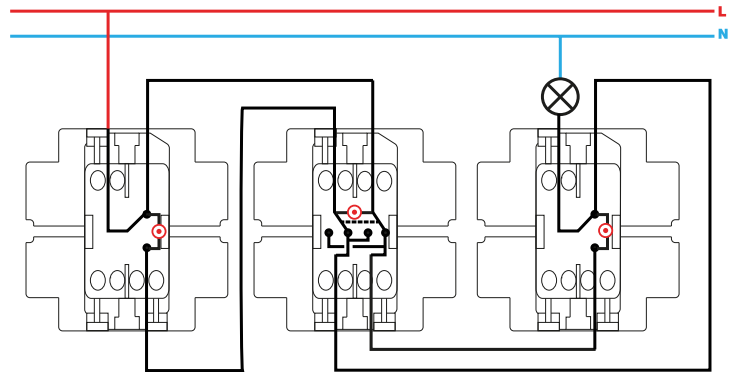

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX