

USB C charger 20W Power Delivery aluminium Simon 270

REF. 20000382-093



BASIC INFORMATION

FINISH

Matt aluminium

MATERIAL

Thermoplastic

ETIM CLASS

EC002949

SYMBOL

PD

COMPATIBILITY

Simon 270 frames

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FORMAT

USB

FREQUENCY

50 - 60 Hz

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

230 V~

OPERATING TEMPERATURE RANGE (°C)

0 - 35°C

POWER SUPPLY (V~)

127/230 V~

RAL

9006

USB PORT TYPE

C

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053353288

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.057

PRODUCT NET WEIGHT

0.043

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053353288

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

55

PACKAGING WIDTH

40

PACKAGING LENGTH

65

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

143000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.057

PACKAGING NET WEIGHT

0.043

PACKAGING WEIGHT UNIT

KGM

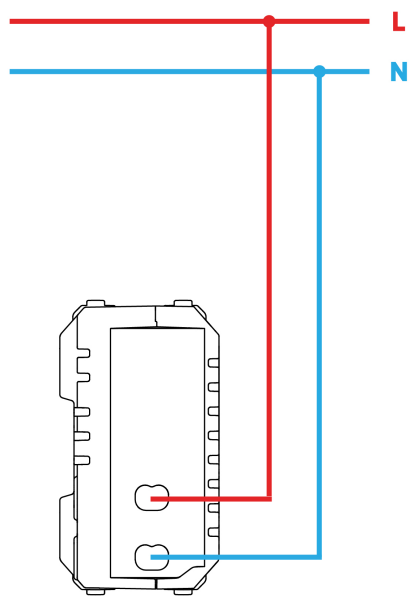

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet