

Intermediate switch 10AX 250V~ with fast terminal connection system ivory Simon 27 Play

REF. 27251-62



BASIC INFORMATION

DESCRIPTION

Crossing switch with an intensity of 10 AX and a power of 250 V~ with a fast-terminal connection system to improve its installation in a universal box vi544 with a tilting type of operation, manufactured in ivory colour and belonging to the Simon 27 Play series. The Simon 27 Play series has been a revolutionary concept that always takes care of the details and its mission is always to create the best climax for the customer at home, thus facilitating the mission in their homes to achieve through a single click update, replace, replace redecorate any element of the series when installing. This is why you are offered the possibility of replacing the finish of the supplied rocker with another seven additional finishes available for customization of the element, it is easy to install as it is suitable for surface mounting or flush mounting and also offers endless possibilities for customisation.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 7 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251911

UNITARY PACKAGING HEIGHT

45.5

UNITARY PACKAGING WIDTH

38.1

UNITARY PACKAGING LENGTH

45.5

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.079

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.034

PRODUCT NET WEIGHT

0.026

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035559

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

53

PACKAGING WIDTH

160

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.866

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.343

PACKAGING NET WEIGHT

0.26

PACKAGING WEIGHT UNIT

KGM

MECANISMOS SIMON 27, 28 Y 44

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XX00101-XX



Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX



Conmutador / 2-way switch
XX00201-XX



Conmutador cruce / Intermediate switch
XX00251-XX

Mecanismos con piloto / Pilot switches



Interrupor unipolar / Single-pole switch
XX00102-XX



Interrupor bipolar / Double pole switch
XX00134-XX



Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

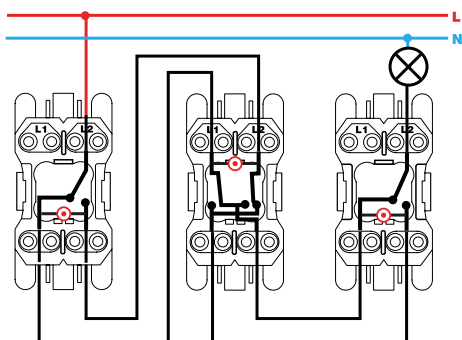

Conmutador cruce / Intermediate switch
XX2700254-XX