


SLIM suspended luminaire 4000 K Symmetric Optics 1.5 m White

REF. 90013110-400

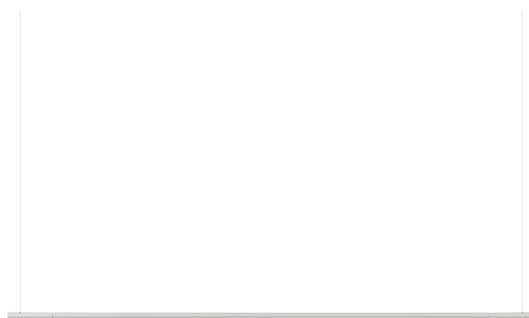

BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001743

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

69x1600x175 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

2600 lm

IP RATING

IP20

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ELECTRICAL CLASS

II

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

230 V~

ENERGY EFFICIENCY

A+

OPTICS

Symmetric

RAL

9016

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

4000 K

L90 (°C)

30000h at 25°C

POWER FACTOR (Φ)

> 0,9

CONTROL

1-10 V

COLOR TYPE

CW

POWER (W)

30 W


CRI

80

LIGHTING EFFICIENCY (LM/W)

hasta 78 lm/W

PHOTOMETRY ASSETS - POLAR

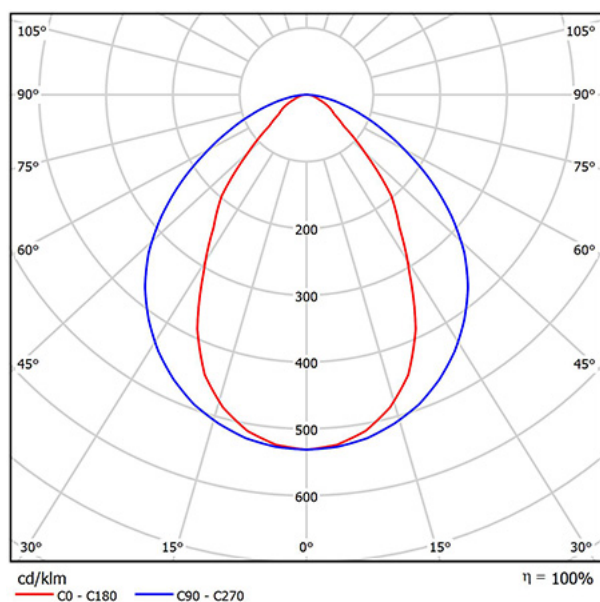

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Table-top, Free-standing, Wall-mounted

INSTALLATION TYPE

Suspended

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547039982

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

2.68

PRODUCT NET WEIGHT

2.2

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547039982

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

67

PACKAGING WIDTH

170

PACKAGING LENGTH

1580

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

9962000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

2.42

PACKAGING NET WEIGHT

2.2

PACKAGING WEIGHT UNIT

KGM