
Framework for 6 elements in adjustable floor box white Simon 500 Cima

REF. **52051803-030**

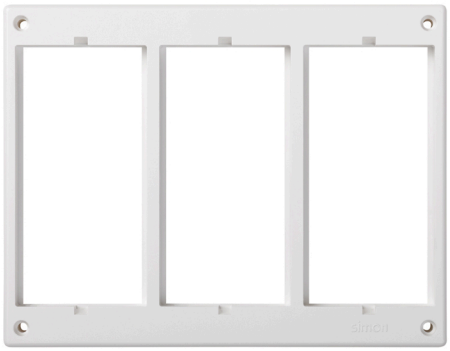

BASIC INFORMATION

DESCRIPTION

The Simon 500 Cima series presents the adjustable floor box kit for raised floor with 6 elements comprising 2 double sockets for standard current circuits and 1 double Schuko plug and 2 plates for 1 RJ45 3M ® that have been specially designed for installation in raised floor. The piece has insertion by cutting (1 click ®, measures 226x187x92 mm, a few finishes in grey colour is very versatile and is compatible with elements up to 250 Volt voltage and 16 Ampere current. Also, ensure that the flame spread notional is not in the event of a fire and a very low toxicity in case of smoke thanks to its manufacture with metal components with self-extinguishing thermoplastic insulation and halogen coated fully halogen-free. This product can be combined with the flush-mount trim cover in the case of that you do not install the same floor covering. Simon guarantees the highest quality in its products thanks to their experience as a leading company in the sector. Its collection Simon 500 Cima is the test of this, as it manages to assemble the safest solutions for the most demanding market for their customers.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework. You only need to order it as a spare part in the event of breakage or loss.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6 and 8 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

KIT AVAILABILITY
Yes

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
6 modules

RAL
9003

VERSION
6 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using screws

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.065

PRODUCT NET WEIGHT
0.065

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093290

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
100

PACKAGING WIDTH
135

PACKAGING LENGTH
347

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
4684500

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.65

PACKAGING WEIGHT UNIT
KGM

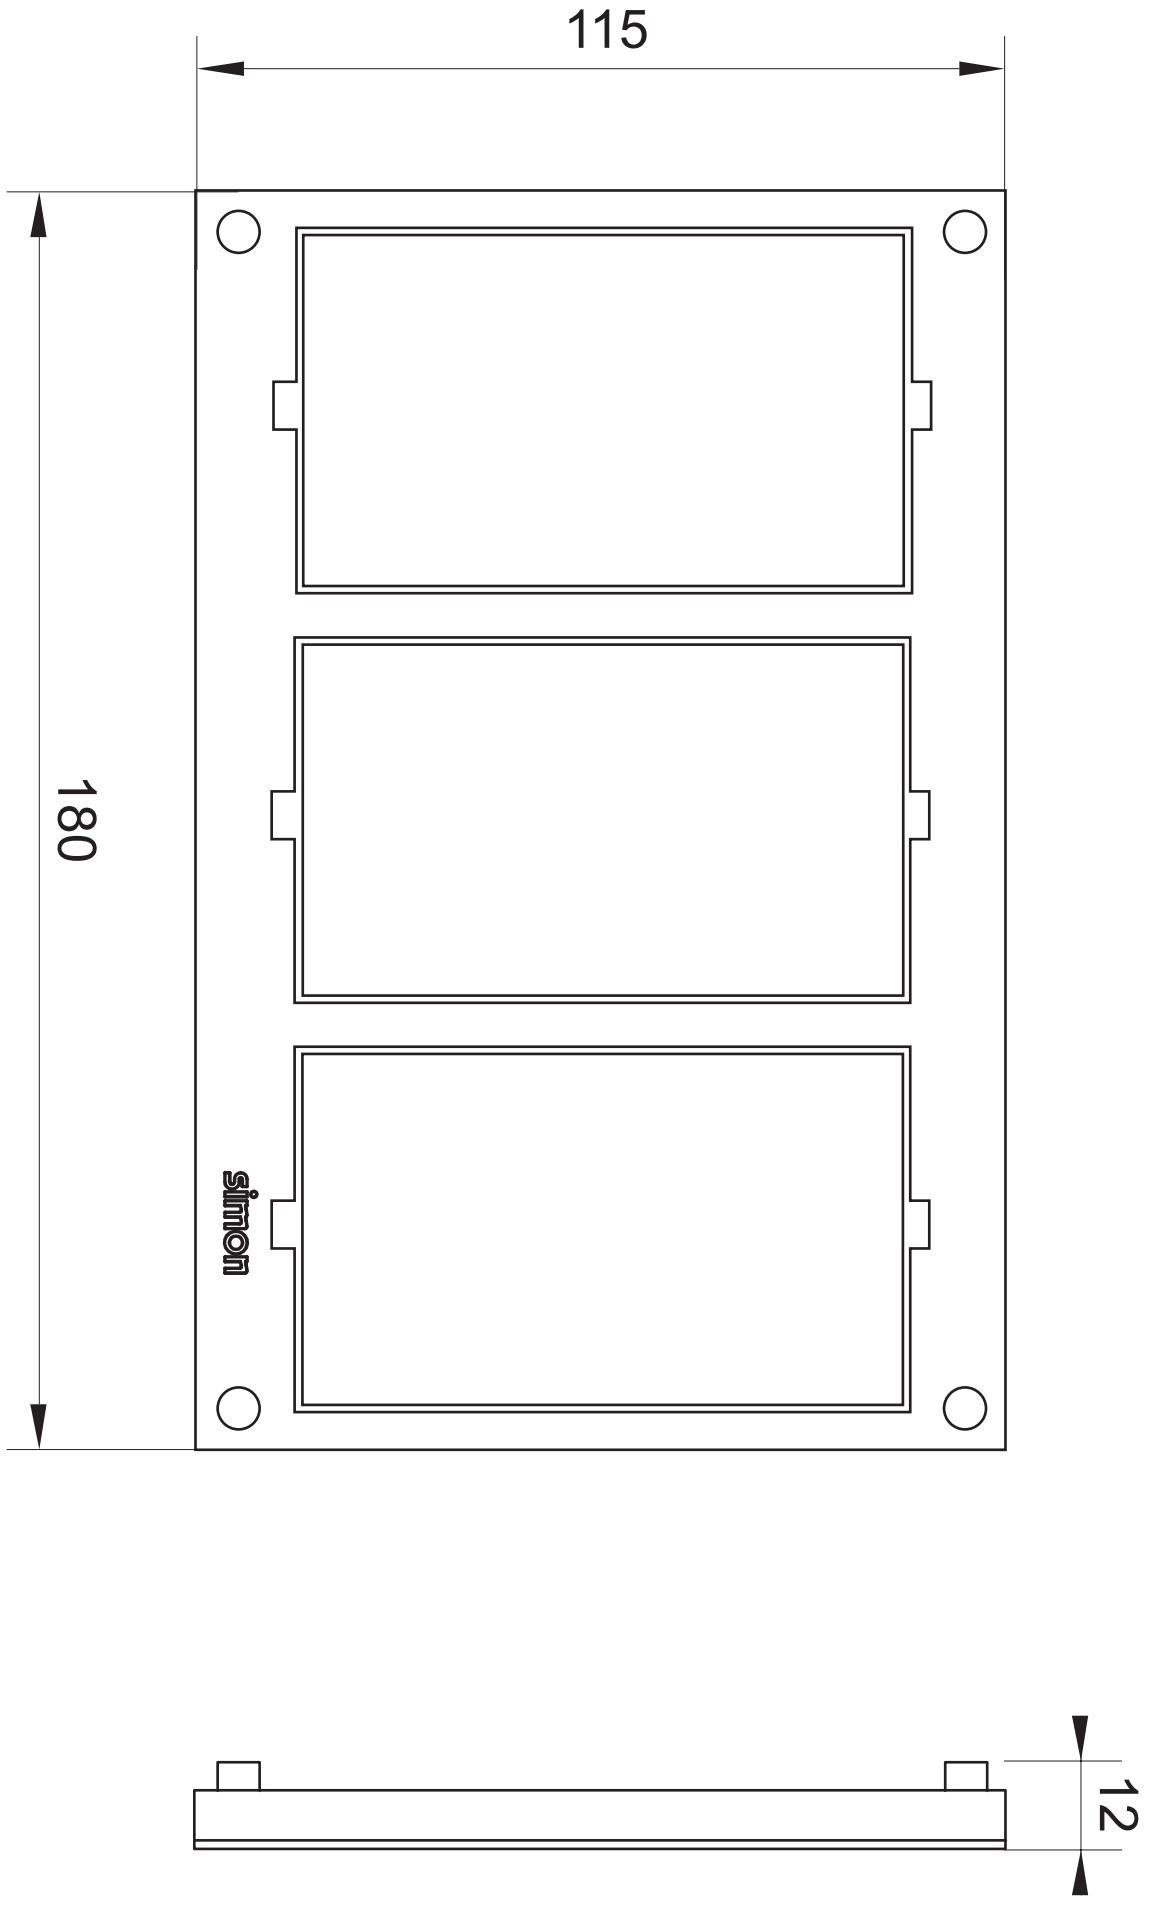
115
180
simon
12