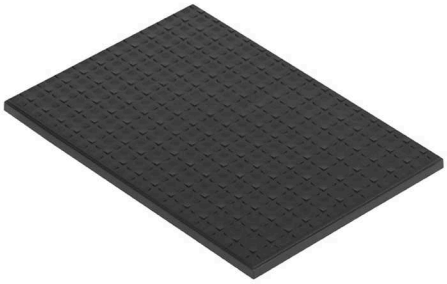
Flush-mount trim cover for adjustable floor box or service cover 4 elements graphite Simon 500 Cima

REF. **52053102-038**



BASIC INFORMATION

DESCRIPTION

With an optional element to combine with the floor box if not installing the same floor lining, the Flush-mount trim cover for adjustable floor box or service cover with four elements in graphite colour of the Simon 500 Cima series, it is a product that is highly demanded by private individuals and professionals to complete the electrical installations of private homes, commercial premises and corporate headquarters. This is a very present in public and private buildings with a high daily activity thanks to the features resistant and durable of its structure, which has been designed with halogen-free thermoplastic material. Also, these components guarantees no flame propagation in case of fire and the low toxicity in case of smoke 154 x 107 x 5 mm are the dimensions of this cover, whose competitive price is unrivalled in the market today.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
4 modules

RAL
7021

VERSION
4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.078

PRODUCT NET WEIGHT
0.078

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101513

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
170

PACKAGING MEASUREMENT UNIT
MMT

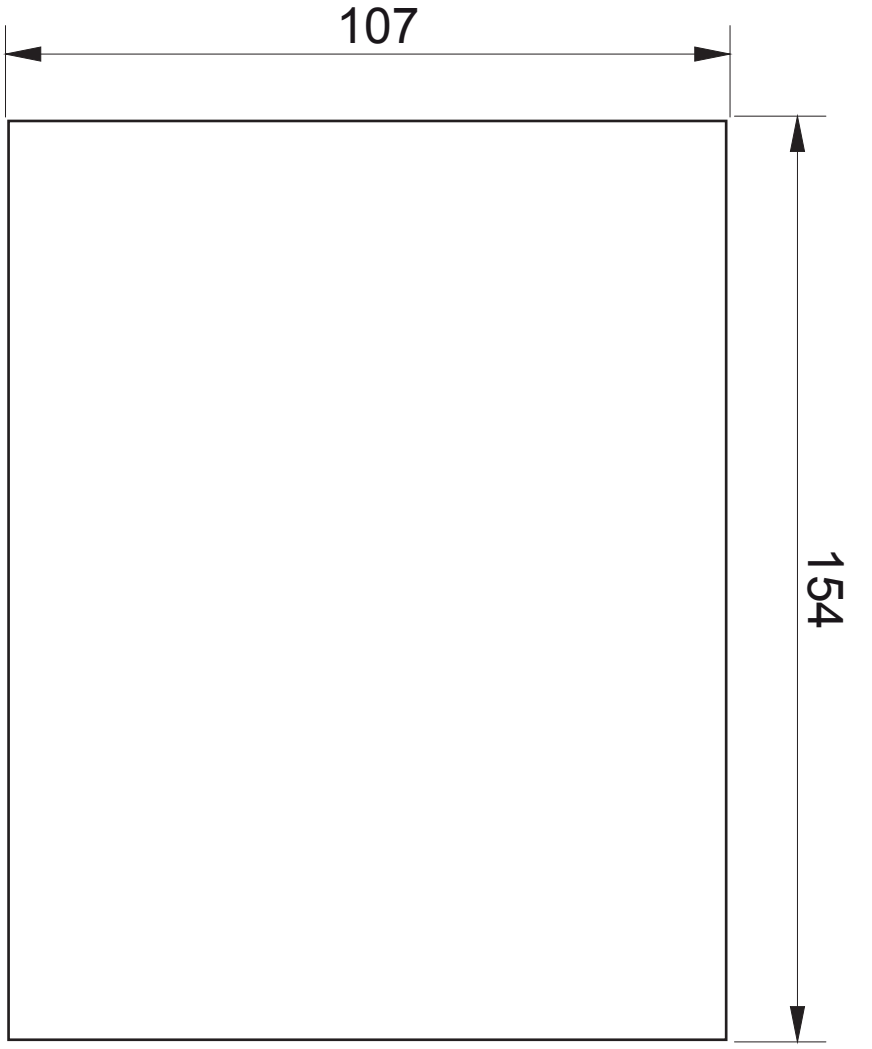
PACKAGING VOLUME
2.116

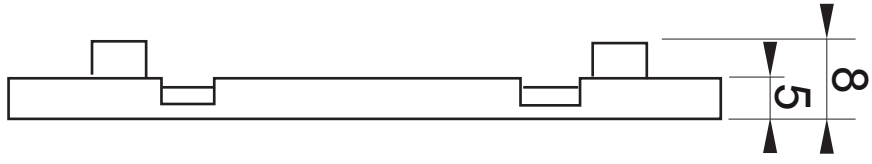
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.78

PACKAGING WEIGHT UNIT
KGM


107
154


8
5