Double-pole switch 16AX 250V~ for half element with pilot light and screw terminal connection system ivory Simon 27 Play

REF. **27134-61**



BASIC INFORMATION

DESCRIPTION

This product is a control mechanism belonging to the Simon Play 27 series. Specifically is a double-pole switch to half element with 16 A current and 250 volts. The product comes with a built-in pilot light. Its installation is designed to be carried out in a simple way, by means of recessed or surface-mounted, always thinking about facilitate the task of the user. It is composed of a module and measures 22.5 x 45 millimetres and features an original and stylish finished in ivory colour, it is ideal for any room with similar features aesthetic and decorative. The rocker operation type is fast and has a capacity of wire section of 1.5 to 2.5 millimetres. Its manufacturing materials make it capable of providing an optimal operation even under high and very low temperatures, which at the same time, it provides security is required. It should be borne in mind that to keep it does not need of any cleaning product specific and dry cleaned, with a cloth.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
0.55 mA

NUMBER OF POSSIBLE ELEMENTS
Half element

INDICATOR FUNCTION
Yes

CURRENT (A)
16 AX

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American, Small spaces and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1201200

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.035

PRODUCT NET WEIGHT
0.035

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053075562

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.012

PACKAGING VOLUME UNIT
HLT


PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.175


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

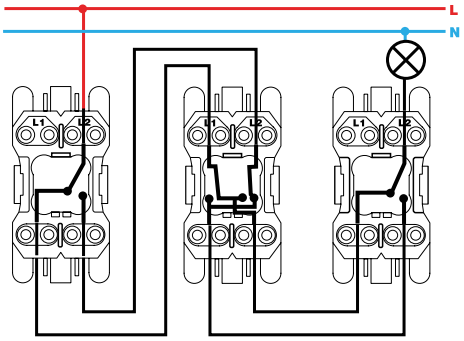


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

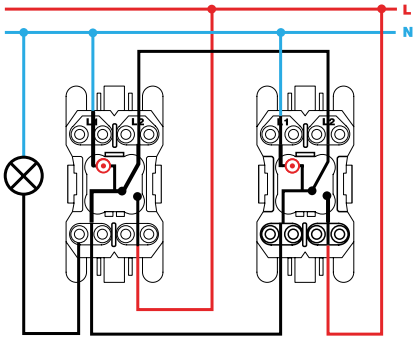


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

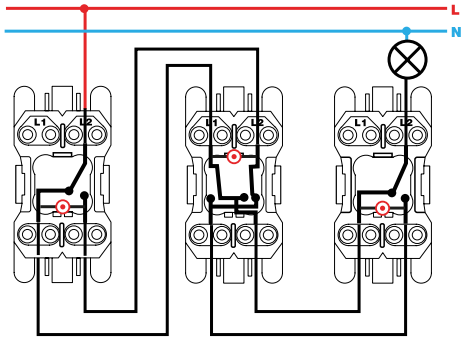

Conmutador cruce / Intermediate switch
XX2700254-XX