


## Flush-mount wall box base for 3 double elements white Simon 500 Cima

REF. 51050003-030

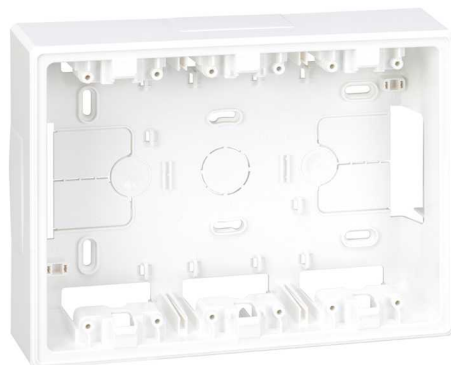

### BASIC INFORMATION

#### FINISH

White

#### MATERIAL

Plastic

#### COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

#### PACKAGING CONTENTS

Surface-mount box base, fixing studs, screws, installation manual

#### ETIM CLASS

EC002328

#### REMARKS

Alternatively, you can screw the frame holders into the box base if you need additional fastening.

## TECHNICAL INFORMATION

### AVAILABLE MARKET CE

### AVAILABLE IN

2, 3 and 4 dual elements

### NUMBER OF CLAMP-HOLDER HOLES

10

### DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

### NUMBER OF ENCLOSURES FOR GROUND CONNECTION

2

### HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

### IK CLASSIFICATION

07

### INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

### IP RATING

IP4X

### KIT AVAILABILITY

No

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

### NUMBER OF MODULES

6

### NUMBER OF PRE-PUNCHED HOLES 30 X 50 MM

2

### NUMBER OF PRE-PUNCHED HOLES 40 X 80 MM

0

### RAL

9003

### NUMBER OF SIDE ENTRANCES

5

### VERSION

3 double elements

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS

Only with tool

### EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### TYPE OF FASTENING

Using the screws supplied

### INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE

Suitable for surface-mount wall installation

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005 + IEC 60884-1 Ed 3.2

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053101216

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING GROSS WEIGHT

0.39

### PRODUCT NET WEIGHT

0.39

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053101216

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

90

### PACKAGING WIDTH

160

### PACKAGING LENGTH

220

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

1.76

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0

### PACKAGING NET WEIGHT

0.39

### PACKAGING WEIGHT UNIT

KGM

