

Set of 2 switches 10AX 250V~ with fast terminal connection system champagne Simon 31

REF. 31398-34



BASIC INFORMATION

DESCRIPTION

Group of 2 switches in champagne colour and belonging to the series Simon 31. It offers a current of 10 AX and a voltage of 250V, quick terminal connection and its operation is tilting type. This group of 2 switches is available in 5 finishes and is always recommended to choose the frame in the same colour as the rocker selected. Its dimensions are 64 x 65 mm and supports a wire cross section of 1.5 to 2.5 mm, with a stripping of 11 mm and can be position, place in rooms with a temperature of between 5 and 40°C, reaching to withstand extreme temperatures of -25 to 50°C, approximately. Complies with the European standards and regulations UNE -s 60669-1: 2002 + A1: 2003 + A2: 2009 and is manufactured with metal components with halogen-free insulation and trim metallized thermoplastic. Its cleaning is quite simple to perform as it will only need to use a soft and dry cloth, without resorting to never use cloths or abrasive cleaners containing chlorine.

FINISH

Champagne

COMPATIBILITY

Simon 31 frames

PACKAGING CONTENTS

Mechanism with rocker

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
INDICATOR FUNCTION No	TYPE OF MECHANISM Pivoting	VERSION Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLATION TYPE Suitable for surface and flush mounting
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.094

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

3026595

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053008836

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.942

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

83

PACKAGING NET WEIGHT

0.94

UNITARY PACKAGING GROSS
WEIGHT

0.094

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT


KGM

PACKAGING LENGTH


221

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

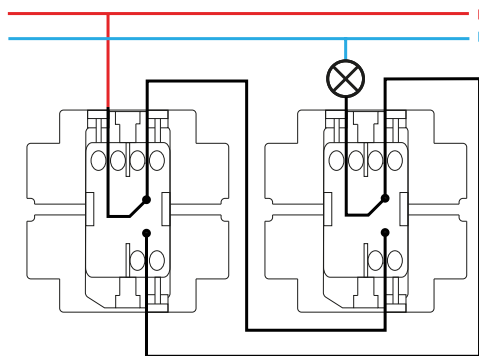


Conmutador / 2-way switch
XXXX201-XXX

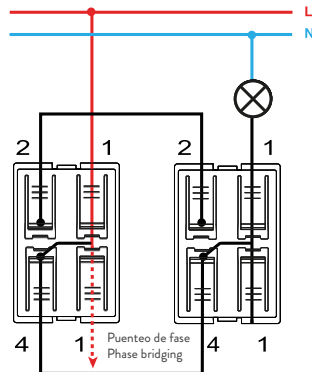


Conmutador / 2-way switch
7700201-039

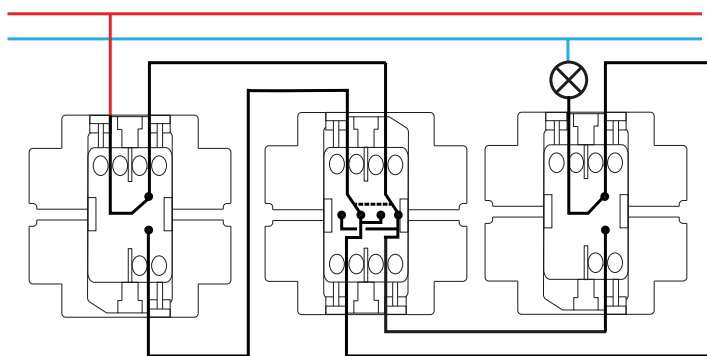


Conmutador cruce / Intermediate switch
XXXX251-XXX

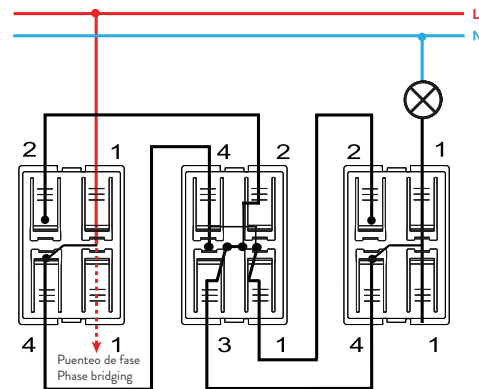


Conmutador cruce / Intermediate switch
7700251-039

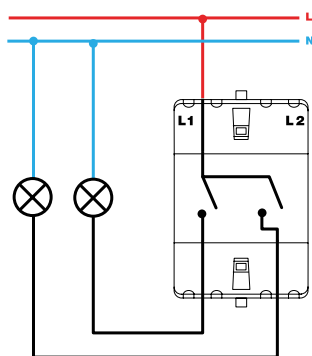


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

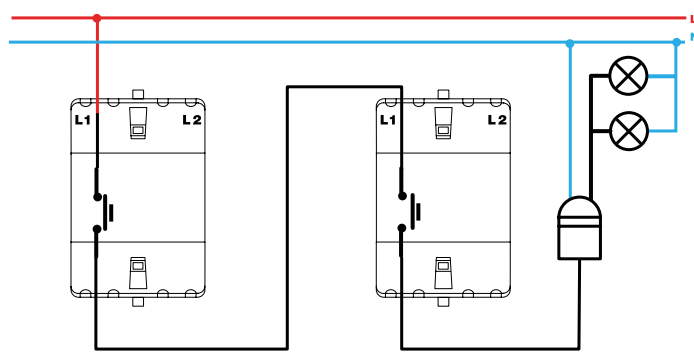


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

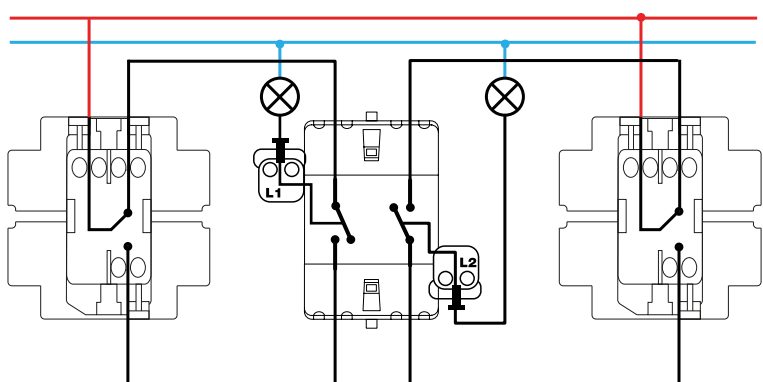


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

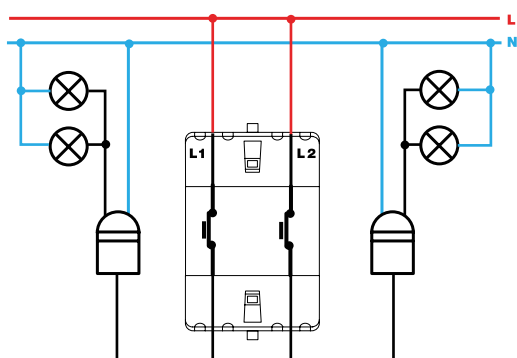


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

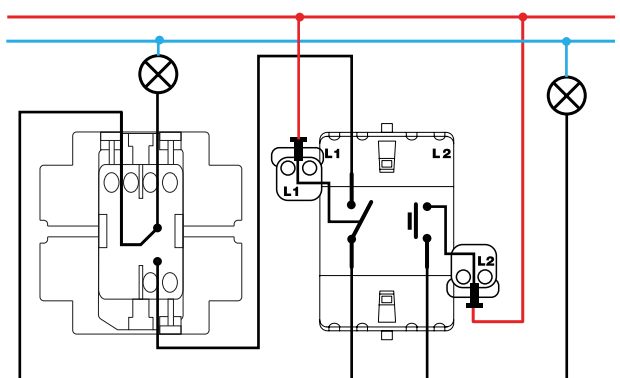


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

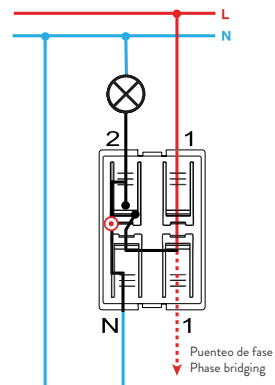


Interrupor con piloto / Push button pilot switch
7700112-039

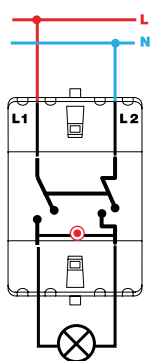


Interrupor bipolar / Double pole switch
XXXX134-XXX

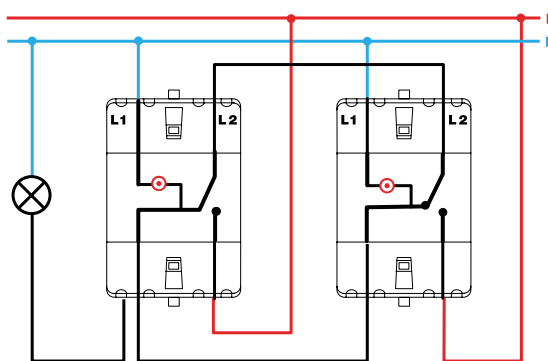


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

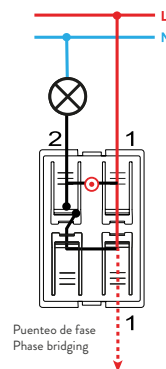

Pulsador con luminoso / Push button switch with light
7700160-039

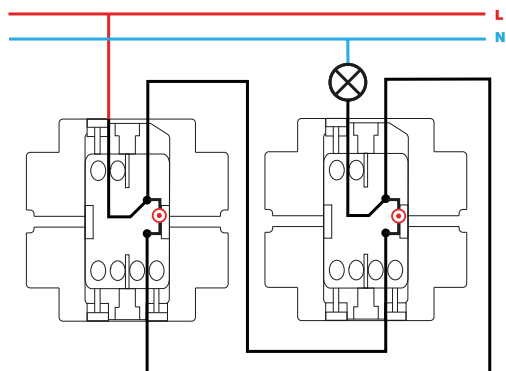

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

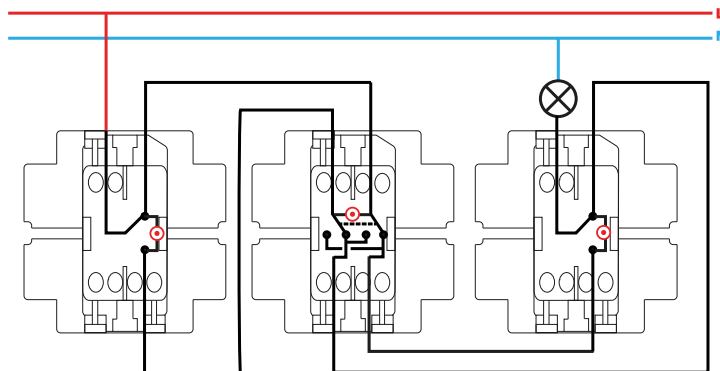

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX