Aluminium mini column with 1 side for 8 elements white Simon 500 Cima

REF. **52550114-030**



BASIC INFORMATION

DESCRIPTION

In the category of a fixed to the floor of the Simon 500 Cima series, we find this mini column manufactured in painted aluminium 1 side and suitable for 8 elements. It has finished in white and has dimensions of 574 x 110 x 72 mm This is a product that complies with the current regulation and is suitable for installation on all kinds of floors, whether the technical or flooring. The thermal resistance is one of its most outstanding qualities. The temperature range of installation optimum is set between -25 and 120 °. The format of the baseboard makes it possible to the mini column can be perfectly with the floor trunking 85x18 mm Vital is also the maintenance of this mechanism is more, the manufacturer recommends cleaning with a soft dry cloth and of soft texture. Remember to avoid those cleaners that contain chlorine, as they could damage it.

FINISH

White

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
8

RAL
9003

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094389

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.77

PRODUCT NET WEIGHT
1.77

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094389

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
86

PACKAGING WIDTH
129

PACKAGING LENGTH
1032

PACKAGING MEASUREMENT UNIT
MMT

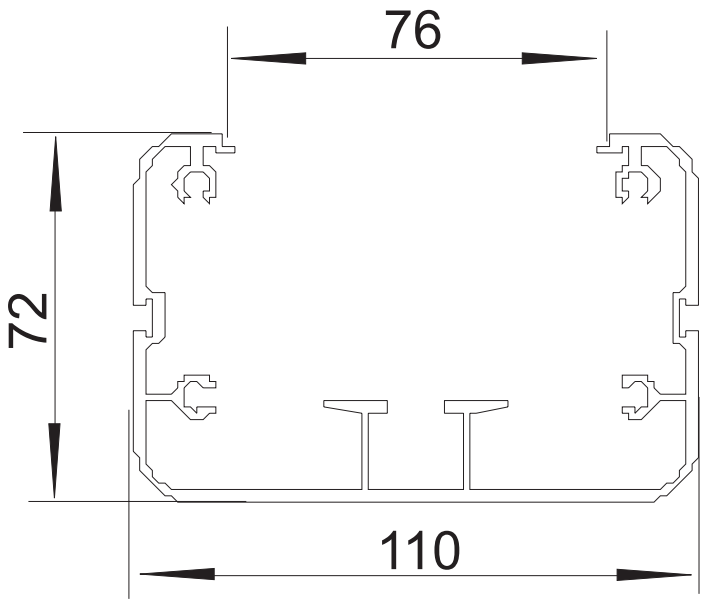
PACKAGING VOLUME
12370560

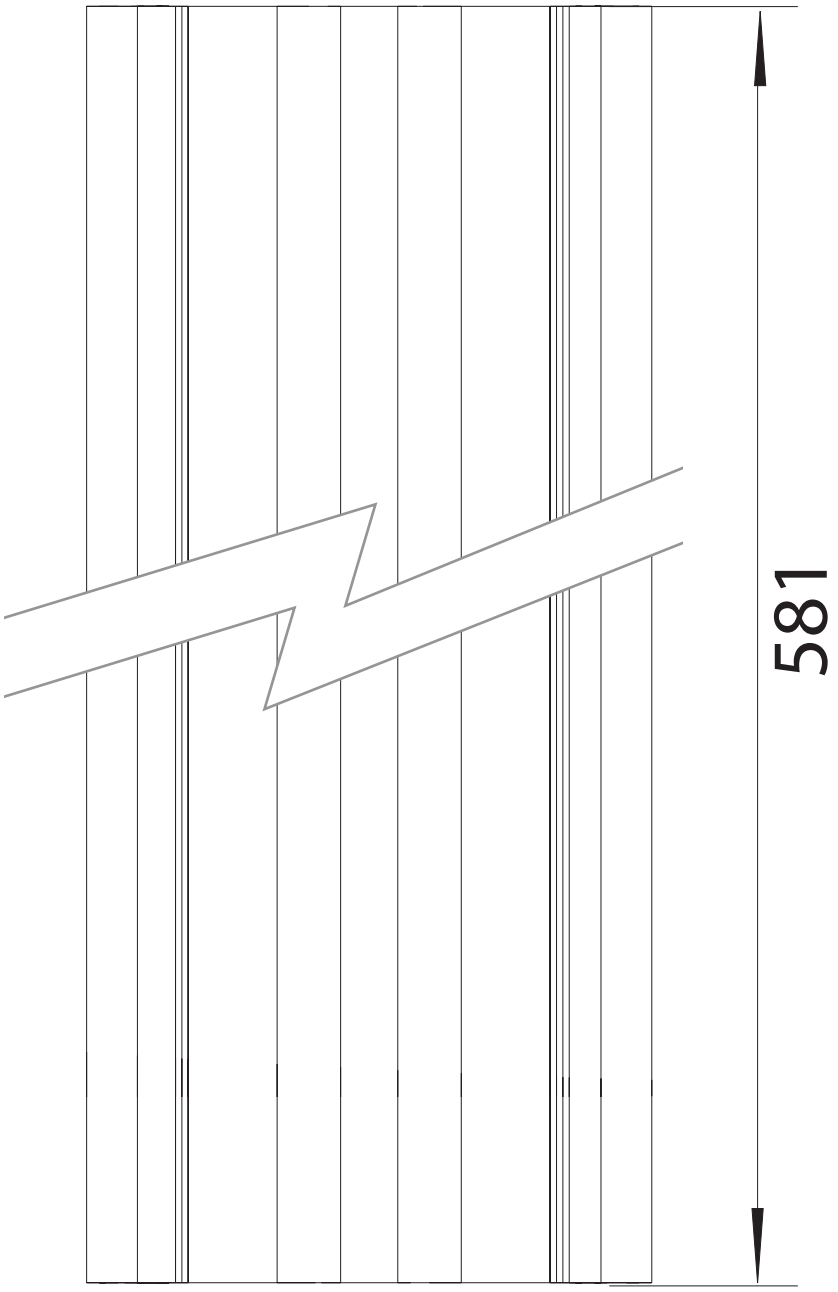
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.77

PACKAGING WEIGHT UNIT
KGM


76
72
110


581