Custom button box 6 functions lighting and blinds control with KNX coupling unit and slide control regulator cold aluminium Simon 82 Sense

REF. **8400675-093**

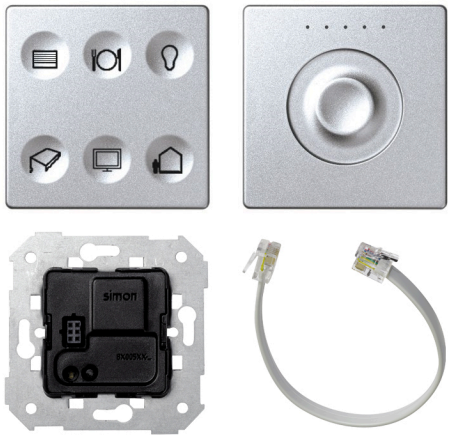

BASIC INFORMATION

FINISH
Matt aluminium

MATERIAL
Thermoplastic

PACKAGING CONTENTS
Coupling unit, keypad, Slide Control, RJ12 cable and instructions

REMARKS
Possibility of customising and creating your own configuration by choosing the functions you need from our icon library.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

IP RATING
IP20

TYPE OF MECHANISM
Touch

NUMBER OF POSSIBLE ELEMENTS
2 elements

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (ºC)
0 - 45 ºC

INDICATOR FUNCTION
Yes

POWER SUPPLY (V~)
Bus KNX (21 Vcc...32 Vcc)

INSTALLATION AND MAINTENANCE

BUS CABLE SECTION ADMITTED (MM)
From 0.5 to 2.5 mm

CABLE STRIPPING NECESSARY (MM)
8

INSTALLATION TYPE
Suitable for surface and flush mounting

BUS CONNECTION TYPE OF TERMINAL CONNECTION
Por inserción

CLAW
Optional

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-5:2016 + + + + + + +

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053129562

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.17

PRODUCT NET WEIGHT
0.17

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053129562

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
82

PACKAGING WIDTH
82

PACKAGING LENGTH
120

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
806880

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.17

PACKAGING NET WEIGHT
0.17

PACKAGING WEIGHT UNIT
KGM