


## Group of 2 two-way switches 10 AX 250V~ with quick terminal connection system Simon 75

REF. 75397-39

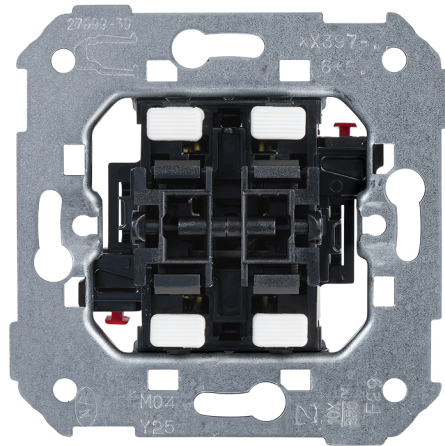

### BASIC INFORMATION

#### DESCRIPTION

Group of 2 two-way switches 10 AX 250 V~ Simon 75 with quick terminal connection system, designed for the control of two lighting circuits switched from different points in the installation. It supports a nominal current of 10 AX at 250 V~ 50 Hz, offering an efficient and safe solution for residential and professional applications. It incorporates an insertion connection system that allows for agile and reliable wiring, accommodating conductors from 1.5 to 2.5 mm<sup>2</sup> with 11 mm stripping. Its tilting operation ensures precise and durable maneuvering in frequent uses. Manufactured with metallic components and halogen-free thermoplastic insulation, in accordance with the EN 60669-1 standard and European directives LVD and RoHS, it ensures resistance, safety, and full compatibility with the Simon 75 series and compatible frames.

#### MATERIAL

Plastic,Metal

#### COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82.

#### PACKAGING CONTENTS

Mechanism

#### ETIM CLASS

EC001590

## TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 30
NUMBER OF CONTACTS 4	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Double
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 6

## INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2015

## LOGISTICS INFORMATION

UNITARY EAN CODE 8421053256039	UNITARY PACKAGING GROSS WEIGHT 0.068	PACKAGING LENGTH 221
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.068	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053003985	PACKAGING VOLUME UNIT MMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 10	PACKAGING GROSS WEIGHT 0.68
UNITARY PACKAGING VOLUME 0	PACKAGING HEIGHT 83	PACKAGING NET WEIGHT 0.68
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 165	PACKAGING WEIGHT UNIT KGM

