

SLIM SYSTEM modular luminaire Light module 4000 K Symmetric Optics 1.5 m White

REF. 90014310-400



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

80x84x1465 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

4700 lm

IP RATING

IP20

DRIVER INCLUDED

No

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ENERGY EFFICIENCY

A+

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

120/277 V~

L70 (°C)

100000h at 25°C

OPTICS

Symmetric

RAL

9016

L90 (°C)

40000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

4000 K

COLOR TYPE

CW

POWER FACTOR (Φ)

> 0,9

CRI

80


LIGHTING EFFICIENCY (LM/W)

hasta 94 lm/W

POWER (W)

50 W

PHOTOMETRY ASSETS – POLAR

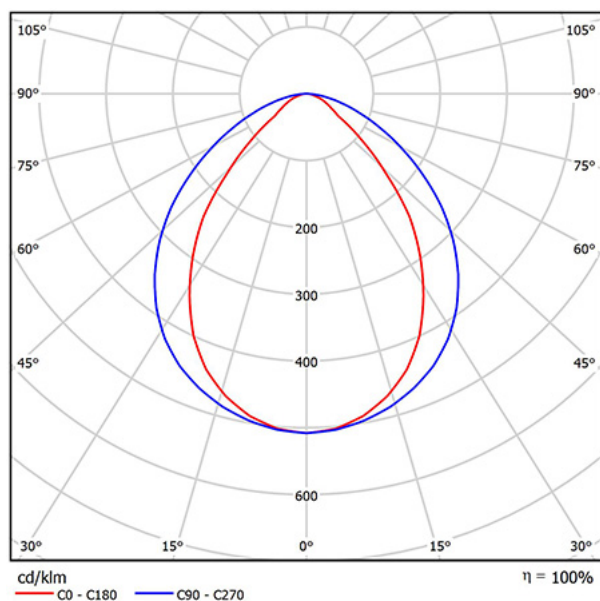

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Suspended

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

No

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547040414

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547040414

PACKAGING VOLUME

9962000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

67

PACKAGING GROSS WEIGHT

1.24

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

170

PACKAGING NET WEIGHT

1.06

UNITARY PACKAGING GROSS
WEIGHT

1.13

PACKAGING LENGTH

1580

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.06