


Double USB charger A+C 30W Power Delivery matt white Simon 270

REF. 20000296-190

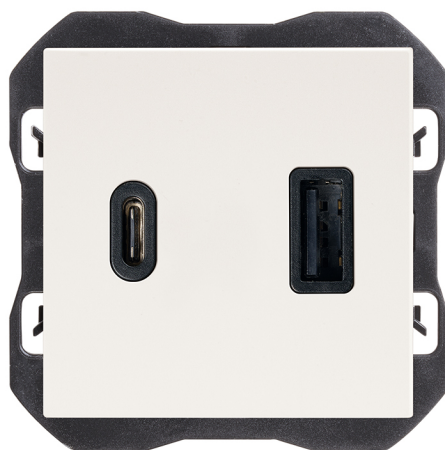

BASIC INFORMATION

DESCRIPTION

Double USB charger A+C 30W Power Delivery from the Simon 270 series, with two fast-charging ports for mobile devices. Made of thermoplastic, it measures 45 x 45 mm. Suitable for flush mounting in a universal back box, in a vertical or horizontal position. Protection rating IP20. Operating temperature range: 5 to 45 °C. Storage temperature range: -25 to 50 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Matt white

MATERIAL

Thermoplastic

ETIM CLASS

EC002949

SYMBOL

PD

COMPATIBILITY

Simon 270 frames

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CONNECTOR TYPE

USB A + USB C

FORMAT

USB

FREQUENCY

50 - 60 Hz

IP RATING

IP20

MAINTENANCE

Clean with a soft cloth and soapy water. Do not use abrasive cloths and/or cleaners containing chlorine.

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

230 V~

POWER SUPPLY (V~)

127/230 V~

RAL

9003

USB CHARACTERISTICS

USB-A: 5,0 VDC 3,0 A 15W | USB-C: 5,0 VDC 3,0 A 15W, 9,0 VDC 3,0 A 27W, 12,0 VDC 2,5 A 30W, 15,0 VDC 2,0 A 30W, 20,0 VDC 1,5 A 30W

USB MAXIMUM POWER (W)

30

USB CURRENT (A)

3.0 A

USB PORT TYPE

A,C

POWER DELIVERY USB

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053314739

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053314739

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.062

UNITARY PACKAGING GROSS
WEIGHT

0.062

PACKAGING LENGTH

55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.062

