

2-way switch 10AX 250V~ with built-in pilot light and fast terminal connection system champagne Simon 31

REF. 31202-34



BASIC INFORMATION

DESCRIPTION

Modernity any space with the design of clean lines and timeless collection the mechanisms of the Simon 31. Designs, elegant and functional, which integrate the maximum innovation in a reduced space. The 2-way switch with rocker operation of this collection, it is designed in a sophisticated champagne colour, and includes pilot system and signalling, with 2 modules and in a format of a dimension of 64 x 65 mm. Manufactured in thermoplastic, halogen-free and thermo-stable trim, it provides security to the room in case of fire, as it is prepared to prevent the flame spread and toxicity by smoke. Its easy installation of quick terminal connection, it adds the compatibility with a power of 250 Volt voltage and 10 AX of intensity, with a consumption of 1 milliampere (mA) of a signaling function. For greater versatility of design, Simon 31 makes it possible to replace the indicator light, combined with which you will find in the reference 31802-31.

FINISH

Champagne

COMPATIBILITY

Simon 31 frames

PACKAGING CONTENTS

Mechanism with rocker

REMARKS

Can be combined with article 31802-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

CONSUMPTION INDICATOR (MA)

1 mA

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VERSION

Single

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
3026595

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.094

PRODUCT NET WEIGHT
0.094

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053008683

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
3026595

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.94

PACKAGING NET WEIGHT
0.94

PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039

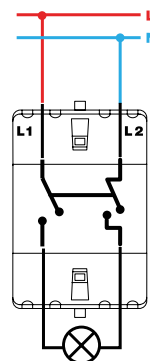

Interrupor bipolar / Double pole switch
XXXX133-XXX

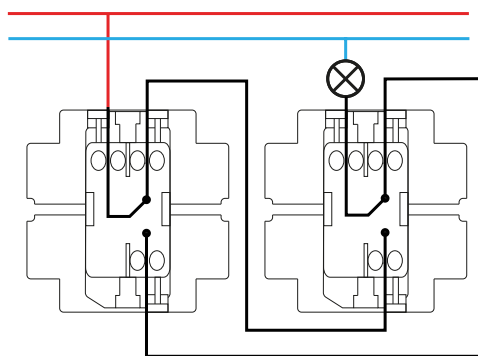

Conmutador / 2-way switch
XXXX201-XXX

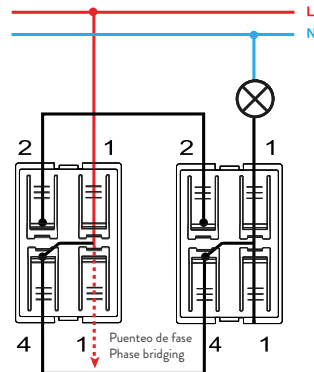

Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX



Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX




Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039

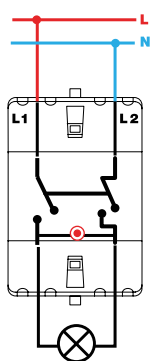

Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039

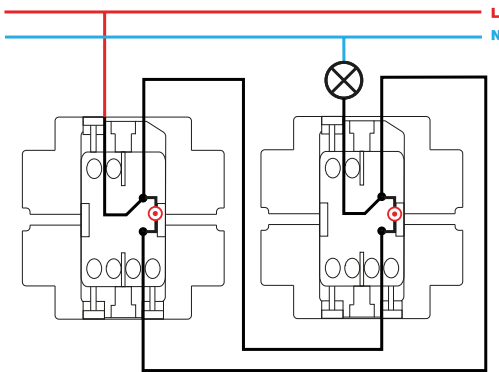

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX