# Italian bipasso socket outlet 10/ 16A with screw terminal connection 1 element red K45

REF. **K06/6**



## BASIC INFORMATION

### FINISH
Red

### MATERIAL
Plastic

### COMPATIBILITY
Simon K45 enclosures for installation on wall, floor, ceiling, and furniture and Simon 500 Cima enclosures (requires combining with the K45 to 500 Cima adapter ref.50012088-030)

### ETIM CLASS
EC000125

## TECHNICAL INFORMATION

### FORMAT
Bipasso

### IP RATING
IP20

### RAL
3002

### CURRENT (A)
10 / 16 A

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)
12

### EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

### REMOVAL OF THE SOCKET
Only with tool

### TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.026

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053314128

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
245

PACKAGING WIDTH
50

PACKAGING LENGTH
110

PACKAGING MEASUREMENT UNIT
MMT

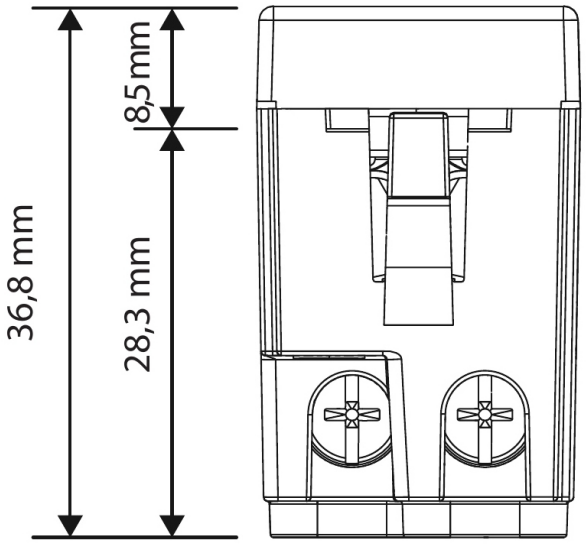
PACKAGING VOLUME
1347500

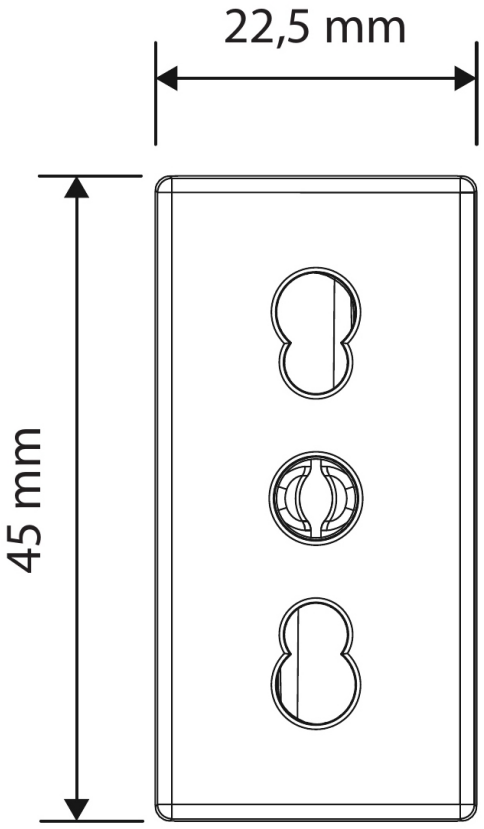
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.599

PACKAGING NET WEIGHT
0.52

PACKAGING WEIGHT UNIT
KGM


36,8 mm
28,3 mm
8,5mm


22,5 mm
45 mm