

USB 2.0 connector type A for half element white Simon 27 Play

REF. 2701090-030



BASIC INFORMATION

DESCRIPTION

USB 2.0 type A of half an element with white finish in colour and that you can find in the Simon 27 Play series, a collection with which you can enjoy decorating, with a socket that part of a revolutionary concept that allows you to take the initiative in redecorating your own spaces. In terms of installation, you should know that the type of terminal connection of the element is by screw, the type of function is by insertion and the format is USB. It is recommended maximum recommended length of cabling: 5 metres for low-speed devices and 2.2 meters for high-speed devices for more information, please refer to the product instruction sheet. It is suitable for installation on the surface-mounted or to be recessed. Its transparent sleeves and rockers allow total personalization: Landscapes, scenes, wallpaper, logos, etc.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

USB female connector and instruction sheet

ETIM CLASS

EC000018

REMARKS

Recommended maximum cable length: 5 metres for low-speed devices and 2.2 metres for high-speed devices. For more information see the product instruction sheet.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 0,2 to 0,5 mm

REVISION

2.0

NUMBER OF CONNECTORS

1

CONNECTOR TYPE

USB

NUMBER OF CONTACTS

5

NUMBER OF POSSIBLE ELEMENTS

Half element

FORMAT

USB

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

TYPE

Type A

VERSION

Single

NUMBER OF WIRES

5

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

5

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053090183

UNITARY PACKAGING HEIGHT

40

UNITARY PACKAGING WIDTH

72.2

UNITARY PACKAGING LENGTH

72.2

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.209

UNITARY PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING GROSS WEIGHT

0.055

PRODUCT NET WEIGHT

0.055

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053090183

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

600

PACKAGING WIDTH

800

PACKAGING LENGTH

800

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

384

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.056

PACKAGING NET WEIGHT

0.055

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


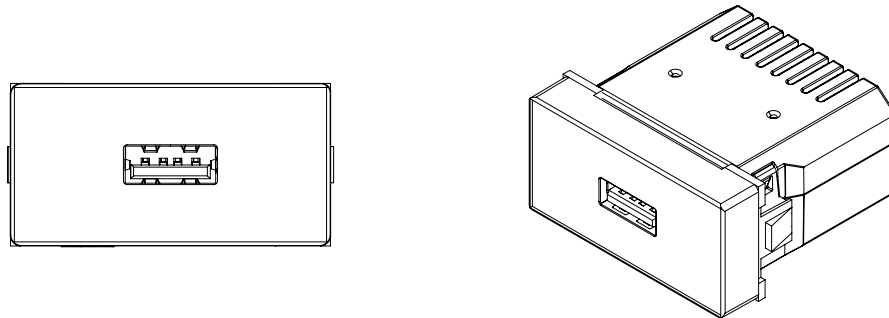


DIAGRAMA DE MONTAJE

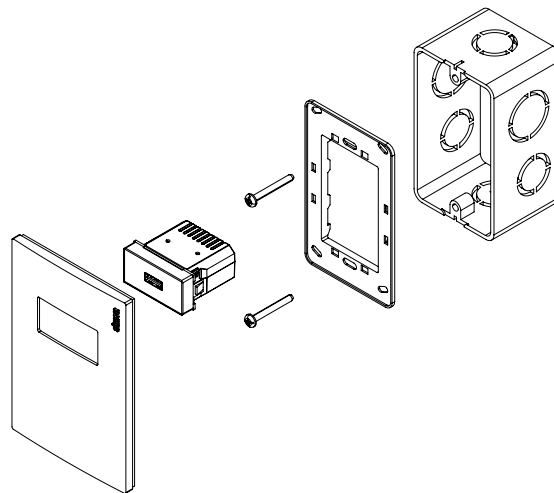

*Placa y chasis NO incluidos