

Downlight 725.28 4000K DALI

REF. 72528330-884



BASIC INFORMATION

APPLICATION

General lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CRI

80

LUMENS/W

2570 lm/23W

IP RATING

IP44

ELECTRICAL CLASS

Type 2

OPTICS

General

OPERATING TEMPERATURE RANGE (°C)

-10 - 35 °C

L70 (°C)

54.000 h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

POWER SUPPLY (V~)

220/240 V~

LIGHT BEAM APERTURE ANGLE (°)

121°

POWER (W)

23 W

COLOR TEMPERATURE (K)

4000 K

LIGHTING EFFICIENCY (LM/W)

111 lm/W

SERVICE LIFE

50.000 h


CONTROL

DALI


LUMENS (LM)

2570 lm


CHROMATICS CRI ICONS



PHOTOMETRY ASSETS – CONICAL

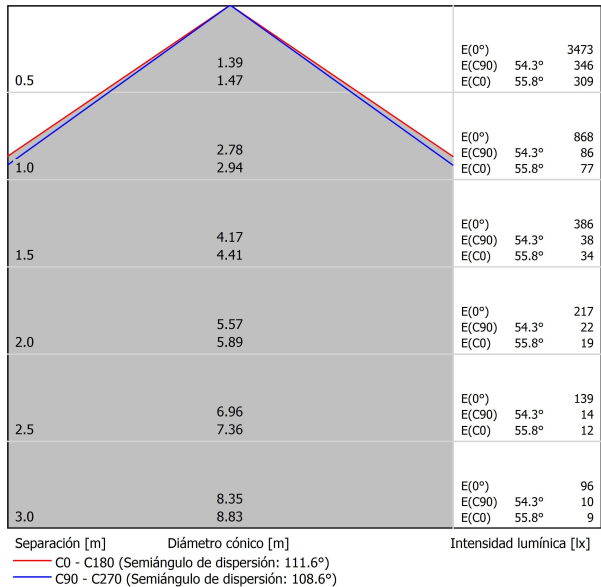

PHOTOMETRY ASSETS – POLAR

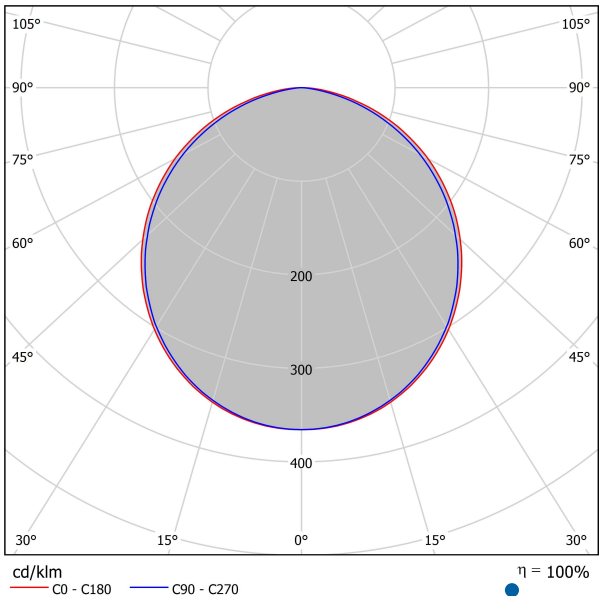

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Flush mount

REGULATIONS

WARRANTY

3 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053282526

UNITARY PACKAGING HEIGHT

5.5

UNITARY PACKAGING WIDTH

26.5

UNITARY PACKAGING LENGTH

29

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

4226.75

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.9

PRODUCT NET WEIGHT

0.586

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053282526

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

5.5

PACKAGING WIDTH

26.5

PACKAGING LENGTH

29

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

4226.75

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.9

PACKAGING NET WEIGHT

0.586

PACKAGING WEIGHT UNIT

KGM