

SLIM mini wall-mounted luminaire 4000 K Symmetric Optics Black

REF. 90012110-488



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC002892

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

69x860x175 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

1300 lm

IP RATING

IP20

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ELECTRICAL CLASS

II

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

230 V~

ENERGY EFFICIENCY

A+

OPTICS

Symmetric

RAL

9005

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

4000 K

L90 (°C)

30000h at 25°C

POWER FACTOR (Φ)

> 0,9

CONTROL

On/Off

COLOR TYPE

CW

POWER (W)

16 W


CRI

80

LIGHTING EFFICIENCY (LM/W)

hasta 78 lm/W

PHOTOMETRY ASSETS - POLAR

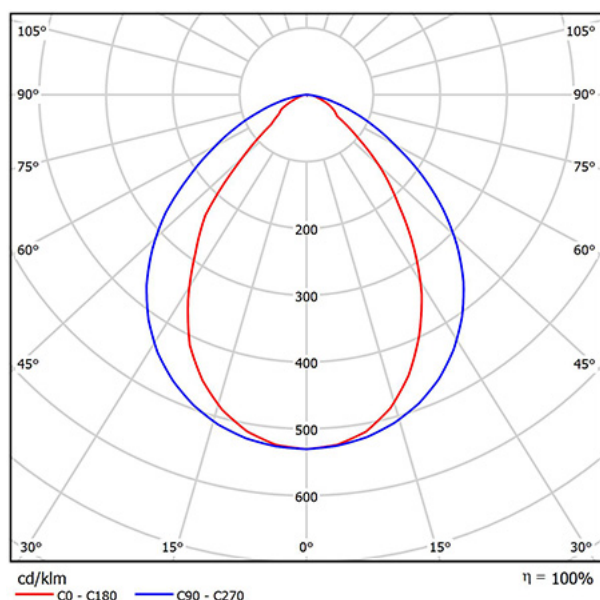

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Suspended, Table-top, Free-standing

INSTALLATION TYPE

Wall-mounted

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547039821

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

1.56

PRODUCT NET WEIGHT

1.32

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547039821

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

69

PACKAGING WIDTH

175

PACKAGING LENGTH

860

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

10535000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.88

PACKAGING NET WEIGHT

1.32

PACKAGING WEIGHT UNIT

KGM