Service cover for 4 elements for installation in concrete floor or raised floor graphite Simon 500 Cima

REF. **52054102-038**



BASIC INFORMATION

DESCRIPTION

The kit 52054102-038 adjustable floor box for 4 elements designed to be installed in raised floor, it is part of the Simon 500 Cima series. It has a few simple finishes grey in colour and measures 171x187x92 mm, it also, it has been manufactured with metal components with self-extinguishing thermoplastic insulation coated fully halogen-free in order to ensure that there is no flame spread in case of fire, along with a very low toxicity in case of smoke. As interesting fact, not to be installed in the same floor lining, it can be combined with the flush-mount trim cover. For this reason, Simon always guarantees the highest quality in its products through the collection Simon 500 Cima. A collection designed to offer solutions to convert any home in a space much more safe, without do without the best functional mechanisms of the brand.

FINISH

Graphite

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053102-038) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
4 modules

RAL
7021

RECESS DIMENSION (MM)
170 x 155 mm

VERSION
4 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101612

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.785

PRODUCT NET WEIGHT

0.785

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101612

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

0

PACKAGING WIDTH

0

PACKAGING LENGTH

0

PACKAGING VOLUME

0

PACKAGING GROSS WEIGHT

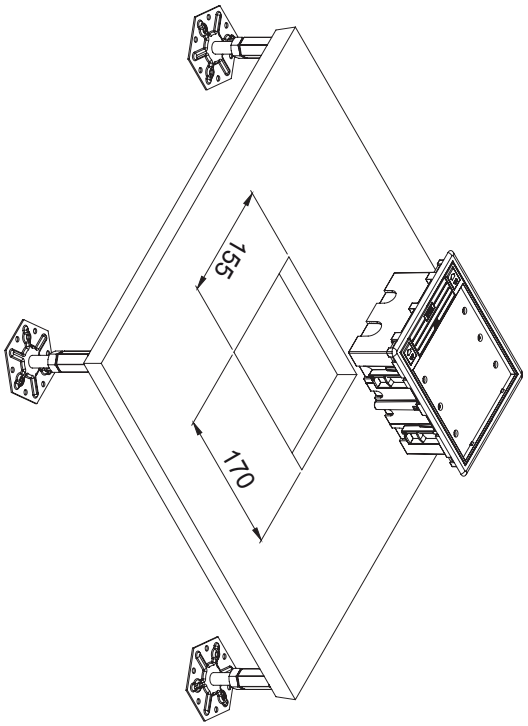
0

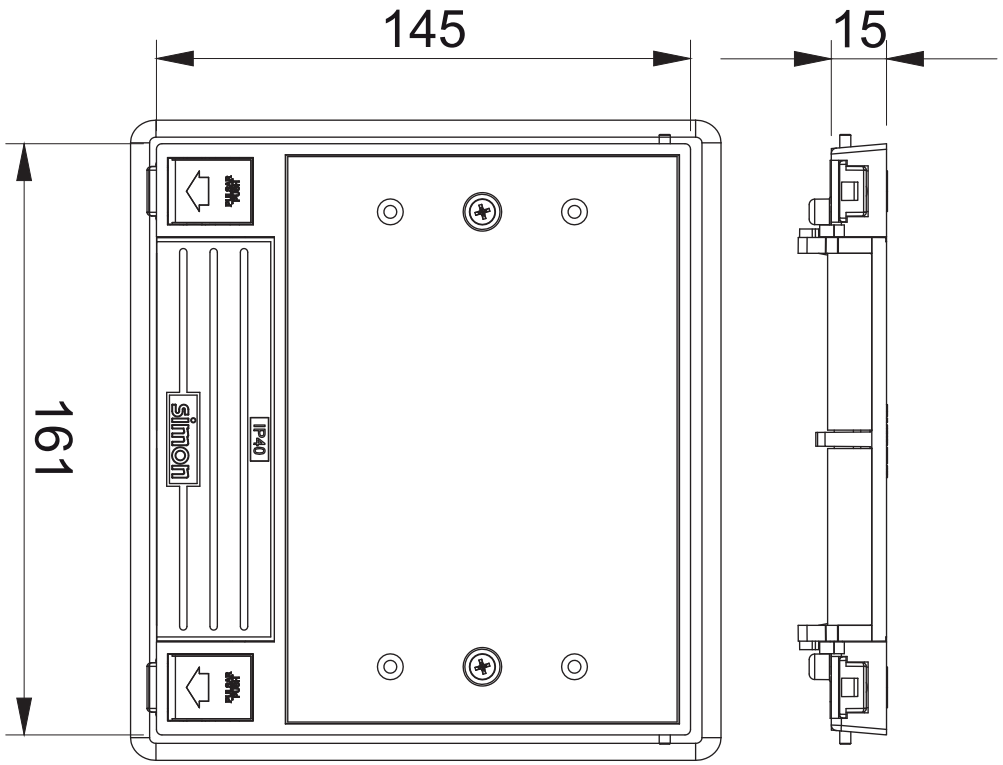
PACKAGING NET WEIGHT

0.785

PACKAGING WEIGHT UNIT

KGM


155
170


145
15
161
simon
IP40