
2-way rotary switch 16A 250V~ with 4 positions

REF. **75233-39**

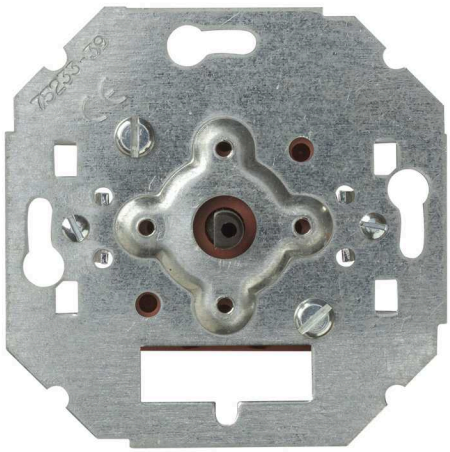

BASIC INFORMATION

DESCRIPTION

Controls the electrical system through the rotary switch of the Simon 75 collection. Aunando/Aunando design and technology, this range of 2-way switches are converted into the perfect complement to achieve a few finishes that balance maximum functionality in a design of clean lines and minimalist style. With a mechanism that includes the stop position and 3 more typefaces, it is ideal for ceiling fans, although its functionalities can spread to all types of electrical mechanisms. To protect the room in case of fire, its components are isolated with halogen-free thermoplastic. With the versatility of being able to be installed both flush-mounted as on the surface-mounted, the rotary switch of the Simon 75 is compatible with a voltage of power of 250 Volt and 10 Ampere current, allowing it wire cross-section of 0.5 mm Design adapted to the new decorative trends and the guarantee of the top innovation and functionality within this rotary switch Simon 75.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Mechanism equipped with stop position and 3 other positions (ideal for ceiling fans)

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
0,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

NUMBER OF FUNCTIONAL POSITIONS
4

INDICATOR FUNCTION
No

CURRENT (A)
16 A

IP RATING
IP20

TYPE OF MECHANISM
Rotary

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CLAW
Included

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Welding

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN IEC 61058-1:2018 |EN 61058-2-5:2011|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255902

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
3409560

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.082

PRODUCT NET WEIGHT
0.082

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053024201

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
252

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
3409560

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.82

PACKAGING NET WEIGHT
0.82

PACKAGING WEIGHT UNIT
KGM