


Flush-mount wall box for 4 double elements supplied in multiple Simon 500 Cima packaging

REF. 51020704-039

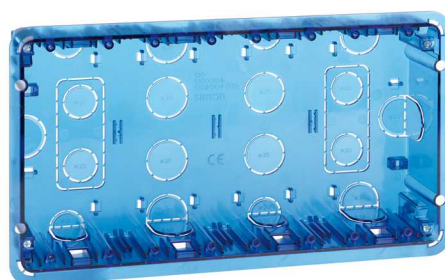

BASIC INFORMATION

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

PACKAGING CONTENTS

Flush-mount wall box, protective cover for box, metal partition wall and film for covering the pre-punched items on the box

ETIM CLASS

EC002601

REMARKS

The flush-mount box can be used as a template during installation thanks to the guides for marking the perimeter of the box

TECHNICAL INFORMATION

AVAILABLE MARKET CE

AVAILABLE IN

1, 2, 3, 4 and 6 double elements

NUMBER OF CLAMP-HOLDER HOLES

14

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION

2

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION

07

INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

IP RATING

IP4X

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

8

NUMBER OF PRE-PUNCHED HOLES 30 X 70 MM

2

RECESS DIMENSION (MM)

262 x 141 mm

NUMBER OF SIDE ENTRANCES

2

VERSION

4 double elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)

Between 4 and 30 mm

REMOVAL OF COMPONENTS

Only with tool

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

Using the claws included in the enclosure, in combination with aggregates, binders, additives, etc.

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Suitable for flush mounting on the wall

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

26

UNITARY PACKAGING WIDTH

58

UNITARY PACKAGING LENGTH

86

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

129688

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.24

PRODUCT NET WEIGHT

0.24

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053114117

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

20

PACKAGING WIDTH

80

PACKAGING LENGTH

120

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

31.655

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT



0

PACKAGING NET WEIGHT


2.4

PACKAGING WEIGHT UNIT

KGM

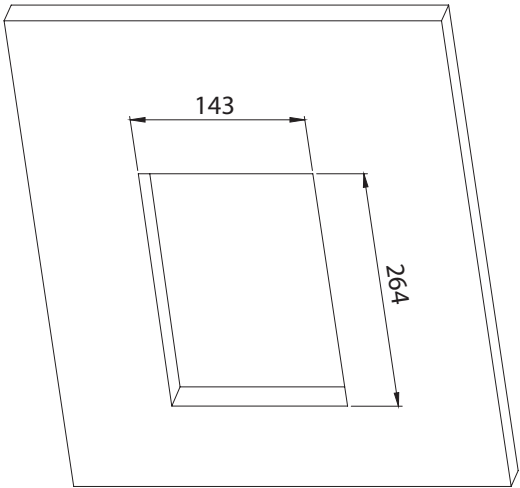

Tabique obra



Tabique hueco

•Grosor pared de 4 a 30mm

