

COOL downlight micro Flush-mounted 3000 K Flood Naked White

REF. 91053002-300



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

84x226x183 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CRI

80

LIGHTING EFFICIENCY (LM/W)

83 lm/W

IP RATING

IP20

DIRECTIONAL

No

LUMENS (LM)

530 lm

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

POWER SUPPLY (V~)

100/240 V~

ENERGY EFFICIENCY

A+

MACADAM STEPS

<3 Step MacAdam

RAL

9016

L70 (°C)

60000h at 25°C

OPTICS

Flood 25°

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

25000h at 25°C

POWER FACTOR (Φ)

0,8

CONTROL

1-10 V


COLOR TYPE

NW

POWER (W)

7 W

PHOTOMETRY ASSETS – POLAR

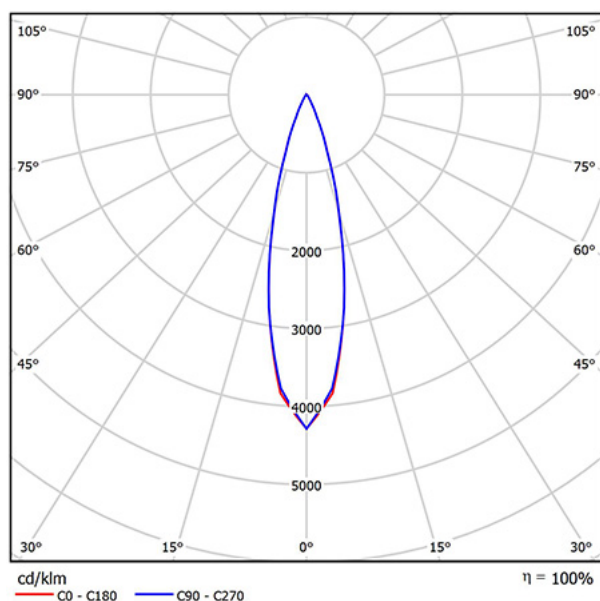

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Surface-mounted

INSTALLATION TYPE

Flush-mounted

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547032204

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547032204

PACKAGING VOLUME

3.222

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

84

PACKAGING GROSS WEIGHT

0.77

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

183

PACKAGING NET WEIGHT

0.7

UNITARY PACKAGING GROSS
WEIGHT

0.976

PACKAGING LENGTH

226

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.7