


Disconnect push-button switch (pressing opens the circuit) 10A 250V~ with fast terminal connection system

REF. 75152-39

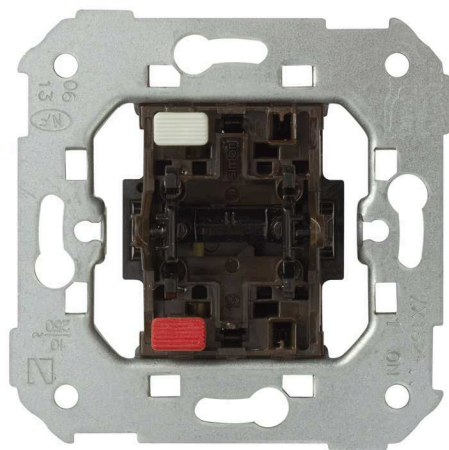

BASIC INFORMATION

DESCRIPTION

The control mechanisms allow us to operate or shut down the electrical systems in a comfortable, quick and easy way. One of the most commonly used in public and private buildings is the shut down push-button (pressing opens the circuit) 10 A to 250V~ with fast-terminal connection system and tilting operation included in the Simon 75 series, suitable for surface and flush mounting, this push-button switch has the possibility of implementing signaling function via cradle blinking and rocker with viewer. It has been manufactured with metal components with halogen-free thermoplastic insulation, materials that make it a very resistant to accidents and knocks and durable over time. This push-button switch has a wire cross section of 1.5 to 2.5 mm and the stripping of the wire 11 mm, at an affordable price for all types of budgets.

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 A	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION Por inserción	CLAW Simon 27	INSTALLATION TYPE Suitable for surface and flush mounting
CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255810

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.058

PRODUCT NET WEIGHT

0.058

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053017562

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.58

PACKAGING NET WEIGHT


0.58

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

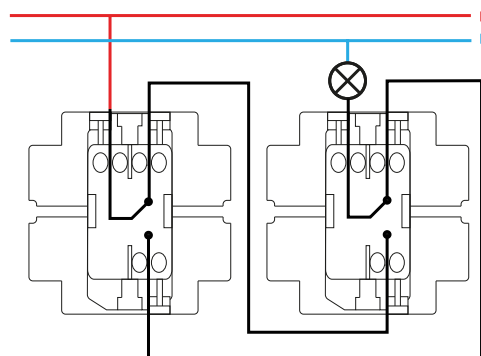


Conmutador / 2-way switch
XXXX201-XXX

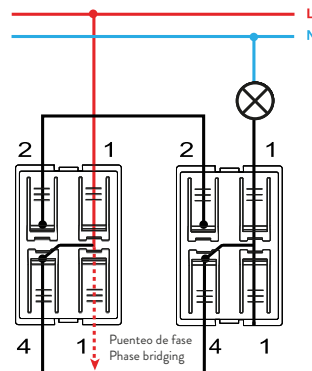


Conmutador / 2-way switch
7700201-039

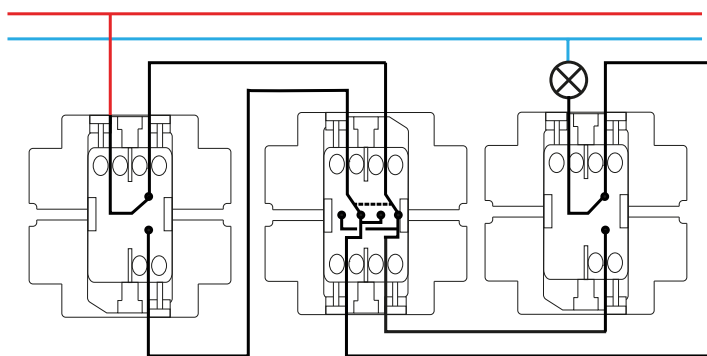


Conmutador cruce / Intermediate switch
XXXX251-XXX

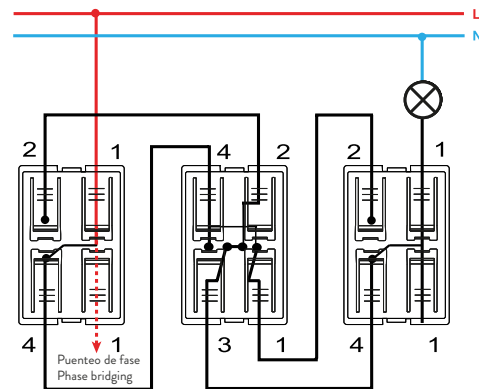


Conmutador cruce / Intermediate switch
7700251-039

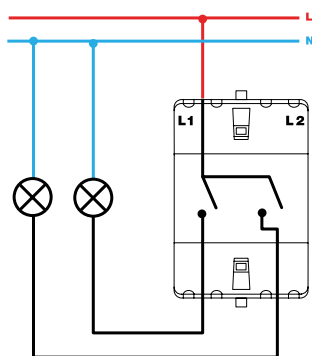


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

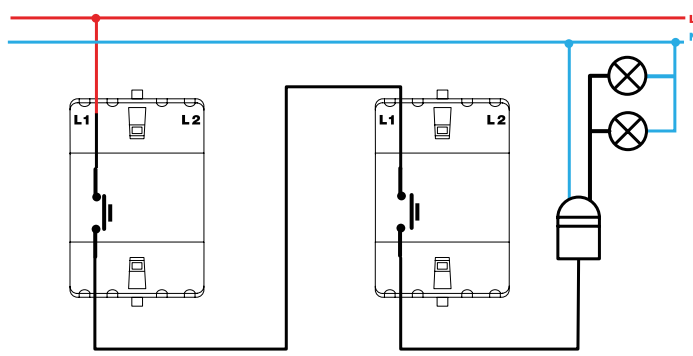


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

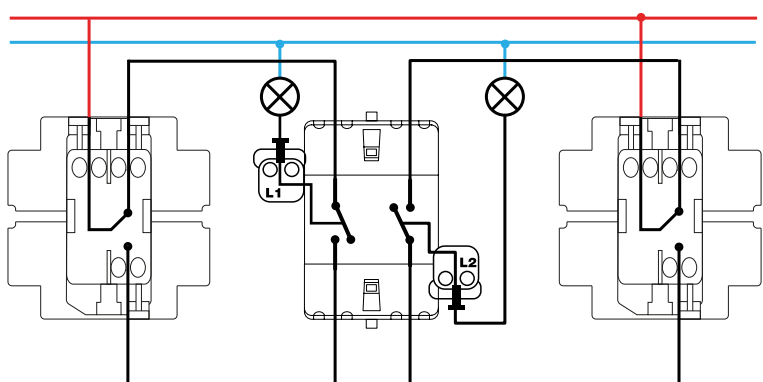


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

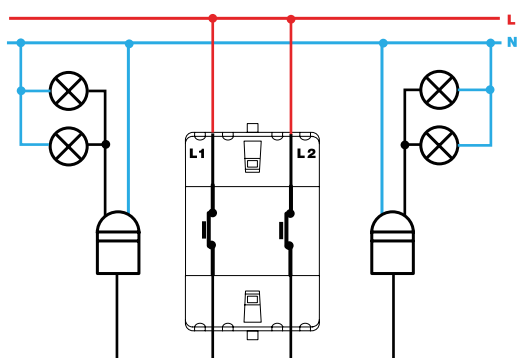


Grupo de pulsadores desconexión / Push button switch
desconexion group XXXX395-XXX

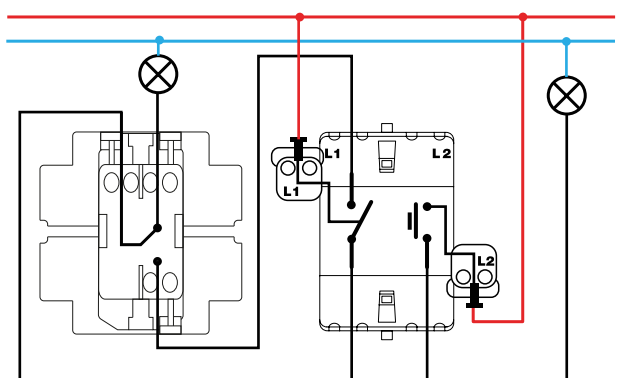


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

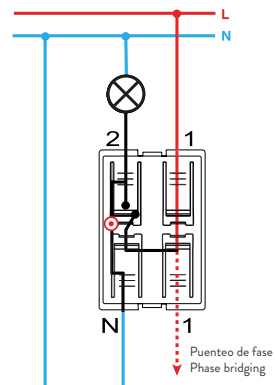


Interrupor con piloto / Push button pilot switch
7700112-039

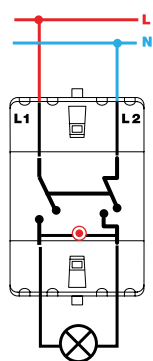


Interrupor bipolar / Double pole switch
XXXX134-XXX

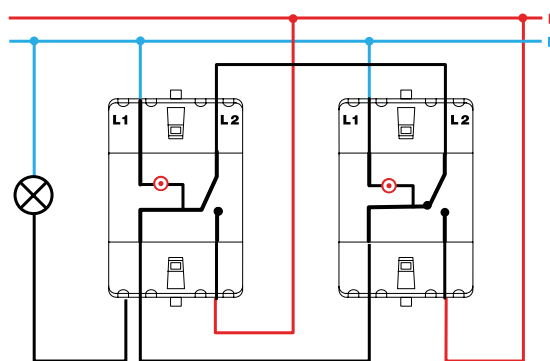


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

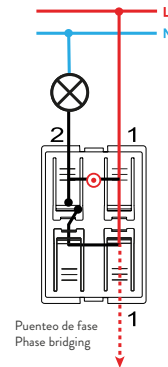

Pulsador con luminoso / Push button switch with light
7700160-039

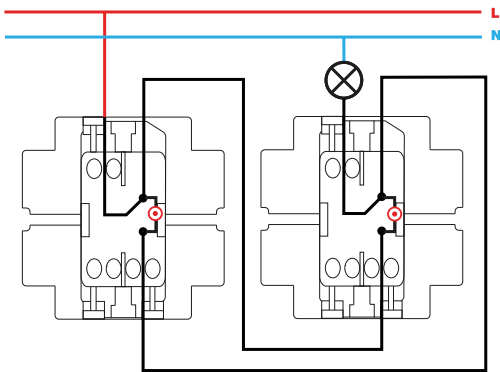

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

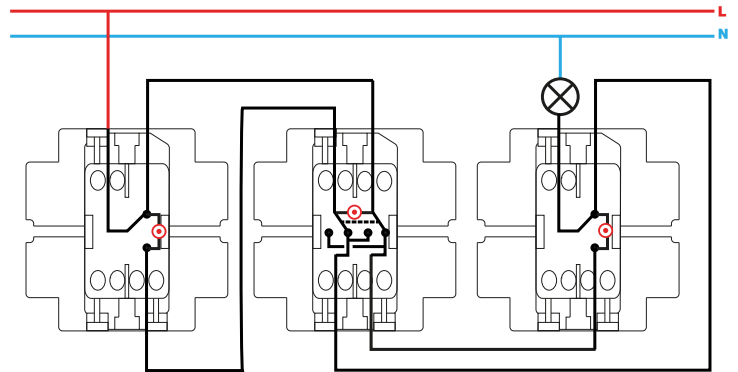

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX