
2-way pull-cord switch 10AX 250V~ with screw terminal connection system

REF. **75203-39**

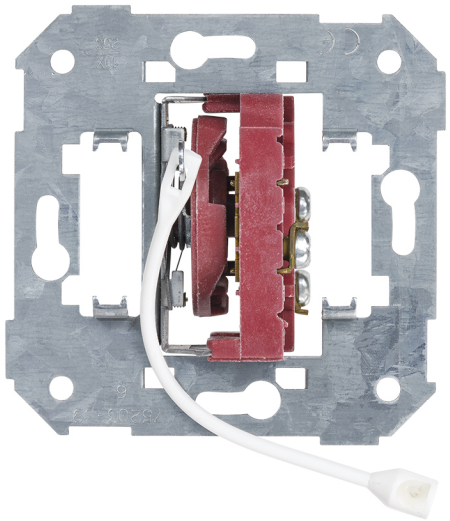

BASIC INFORMATION

DESCRIPTION

If what you need is skew a current of a rung, or interrupt, it will be necessary to a 2-way switch, Simon has a multitude of 2-way switches with multiple options of installation, size, finishes and use or operation. In this case, this product is a pull-cord 2-way switch for currents of up to 10A of intensity and 250 volts. It stands out for its simple screw terminal connection. Its installation is also very simple and can be flush mounted or surface mounted on a surface or wall. Like the majority of Simon products, the 2-way switch you can combine it with other elements of the brand, in this sense, the ideal complement of the product, it is a cover that do trim function and which must be of the same finish to achieve an aesthetic result and harmonious on the final product. The components of the 2-way switch has the characteristic of come with halogen-free thermoplastic insulation, which provides a resistance and hardness extra the product, thus, 2-way switch will present uH good operation under extreme temperature conditions whether are very low and very high and withstand challenges external as knocks or scratches with more easily.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 0,2 to 0,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
10 AX

IP RATING
IP20

TYPE OF MECHANISM
Pull cord

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255858

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
3017190

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.073

PRODUCT NET WEIGHT
0.073

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053032961

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
223

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
3017190

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.725

PACKAGING NET WEIGHT
0.73

PACKAGING WEIGHT UNIT
KGM