


Front kit for 1 element with 1 Simon iO dimmer switch gloss black Simon 100

REF. 10020114-138

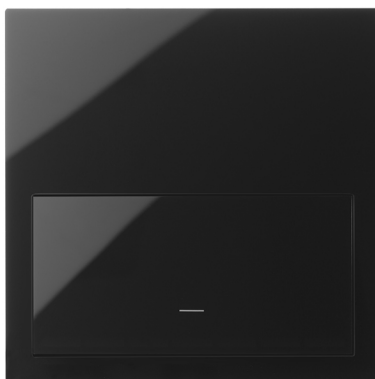

BASIC INFORMATION

DESCRIPTION

Front kit for 1 element with 1 dimmable switch in black with glossy finish, part of the Simon 100 series. Because of its finish it is a versatile product, which can be installed in any type of environment or decorative styles. It works with an intensity of 10 AX, presents a type of emborning by cut, 1 click and a type of operation by means of a rocker.

It has dimensions of 85.5x83.5mm it is a device that can be installed both horizontally and vertically, adapting to the needs of each case.

This product has been made following the regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50581: 2012 + EN 60669-2-1: 2004 + EN 60669-2-1: 2004 A1: 2009.

To ensure proper maintenance of the workdevice, an operating temperature range of 5 to 40° C and a storage temperature range of -25 to 50° C must be preserved. For cleaning, just use a soft cloth dampened slightly with soapy water and do not use cloths and / or abrasive cleaners.

FINISH

Gloss black

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

CURRENT (A)

10 AX

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Push button rocker switch

MONOBLOCK

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

1 element

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for flush mounting

KIT INSTALLATION DIRECTION

Vertical and horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

1 click connection (1 click®)

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-1:2004 + EN 60669-2-1:2004 A1:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053201459

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053201459

PACKAGING VOLUME

70560

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

10

PACKAGING GROSS WEIGHT

0.064

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

84

PACKAGING NET WEIGHT

0.064

UNITARY PACKAGING GROSS
WEIGHT

0.064

PACKAGING LENGTH

84

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.064