


**Two-pole switch 16AX 250V~ with indicator light function
and Faston/welding terminal connection system with plate
black Simon K45**

REF. KL04/14

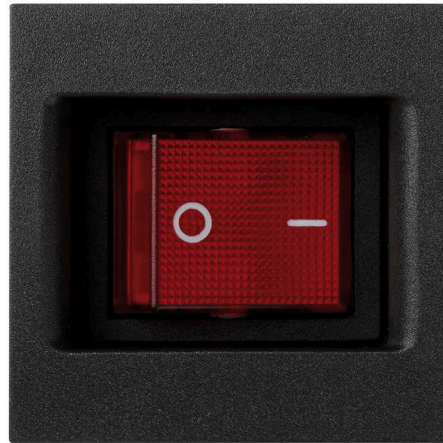

BASIC INFORMATION

DESCRIPTION

The series Simon K45 included in it all kinds of products designed to the interconnectivity in work environments or offices. This is why it needs specific switches, as this double-pole switch (the code of reference is the KL04 / 14) with indicator light function, so it includes an engraving of switching on - OFF. Finished in superb black, it has a Faston/welding terminal system. It is manufactured with the best and safest metal and halogen-free components. Also thermoplastic trim. Maximum durability and the maximum protection for years. Compatible with elements up to 16 Ampere current and 250 Volt voltage. With 1 element and 2 modules and with regard to your application in the wall, is suitable for surface or flush mounting, to clean, do so, simply use a soft, dry cloth. Finally, the user must be taken into account that the article includes the trim plate.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Mechanism with plate, black and blue cabling, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

16 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

Up to 1,5 mm

IP RATING

IP20

RAL

7021

CONSUMPTION INDICATOR (MA)

0.5 W/h

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 item

TYPE OF MECHANISM

Tilting

VERSION

Single

INDICATOR FUNCTION

Yes

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Faston - Solder

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

PRODUCT NET WEIGHT
0.037

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING VOLUME
1472064

UNITARY PACKAGING LENGTH
0

PACKAGING EAN
8426436034518

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
0.3

UNITS CONTAINED PACKAGING
10

PACKAGING GROSS WEIGHT
0.37

UNITARY PACKAGING VOLUME
UNIT
MMQ

PACKAGING HEIGHT
88

PACKAGING NET WEIGHT
0.37

UNITARY PACKAGING GROSS
WEIGHT
0.037

PACKAGING WIDTH
123

PACKAGING WEIGHT UNIT
KGM

PACKAGING LENGTH
136