


Two-way switch 10 AX 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75204-39

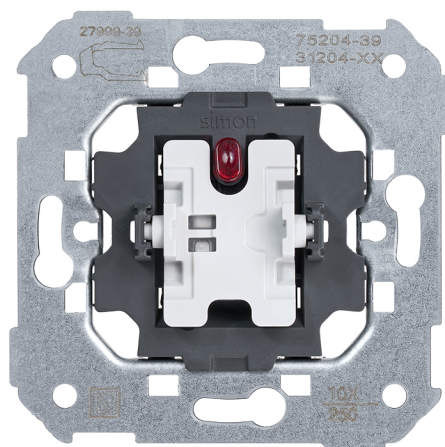

BASIC INFORMATION

DESCRIPTION

This 10 AX 250V~ switch includes a light indicator and a quick terminal connection system, making installation a simple and agile process. In addition, it is suitable for surface and flush-mounted installation and has been manufactured in strict compliance with regulations. It is characterized by extraordinary thermal resistance, although the manufacturer recommends installing the switch in environments where the temperature is between 5 and 40°. It consists of metal pieces with halogen-free thermoplastic insulation. It belongs to the Simon 75 series, a collection that offers innovative control mechanisms like this switch and other devices suitable for adapting to any lifestyle. The series consists of pieces in a multitude of finishes and with different electronic functions that make everyday life much easier. This collection is compatible with the mechanisms of the Simon 77 series.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 AX

RECESS DIMENSION (MM)

40

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF CONTACTS

3

LINKABLE

No

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

FREQUENCY

50 Hz

MONOBLOCK

No

NUMBER OF WIRES

3

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

REMOVAL OF COVER

Only with tool

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255865

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.073

PRODUCT NET WEIGHT

0.073

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003602

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.725

PACKAGING NET WEIGHT

0.73

PACKAGING WEIGHT UNIT

KGM

