
Rocker with viewer for switch with pilot light for 1 element aluminium Simon K45

REF. **K115/8**

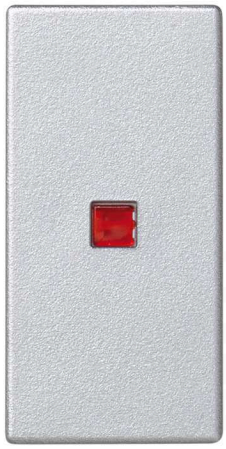

BASIC INFORMATION

DESCRIPTION

With a size of 45 x 22.5 mm and 10 mm depth, the rocker with viewer and 2-way switch with pilot light for 1 element of the Simon K45 collection, it provides security, functionality and a modern design, suitable for all types of spaces. Manufactured with halogen-free thermoplastic, prevents the flame spread and toxicity by smoke, in case of fire and allows the set to reach temperatures of more than 60 ºC. Designed for flush mounted or surface-mounted installation, it adapts to all kinds of decorative spaces and environments, adapting to the needs technical and aesthetics of the room. Also, and for greater versatility of the product, it is available in quarter and half module versions. Functionality, innovation and design within the range of rockers with viewer for 2-way switches of the Simon K45 collection.

FINISH

Aluminium

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Quarter and half module versions

MAX TEMP DURING CONSTRUCTION WORK (ºC)

+60º C

INDICATOR FUNCTION

Yes

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)

-5 to 60º C

NUMBER OF MODULES

Four

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
544320

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.045

PRODUCT NET WEIGHT
0.045

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436047181

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
72

PACKAGING WIDTH
72

PACKAGING LENGTH
105

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
544320

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.225

PACKAGING NET WEIGHT
0.225

PACKAGING WEIGHT UNIT
KGM