


**Switch for card 5 A 250V~ with light indicator and adjustable timing between 0 seconds and 10 minutes
Simon 75**

REF. 75558-39

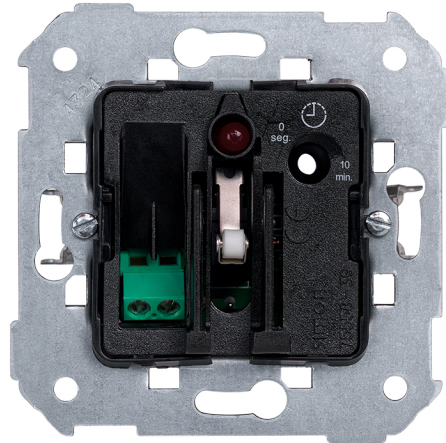

BASIC INFORMATION

DESCRIPTION

Switch for card 5 A 250 V~ Simon 75 with light indicator and adjustable timing between 0 seconds and 10 minutes, designed to optimize energy control in hotels, apartments, and professional spaces. An efficient solution that combines functionality and design in a single mechanism. The adjustable timing allows adapting the disconnection time to each project, promoting energy savings and improving the management of lighting and other associated circuits. The integrated light indicator facilitates location and provides an intuitive user experience. Compatible with multiple Simon series, it visually integrates into any environment, maintaining a clean, safe installation that meets current technical requirements.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82.

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

It is recommended to protect the faston connectors with heat shrink tubing and connect with a power relay.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST	MONOBLOCK No
CABLE SECTION ADMITTED (MM) From 1,0 to 1,5 mm	No	NOMINAL VOLTAGE (V~) 230 V~
CONSUMPTION INDICATOR (MA) 1 mA	FREQUENCY 50 Hz	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
NUMBER OF CONTACTS 5	INDICATOR FUNCTION Yes	RECESS DIMENSION (MM) 40
DISCONNECTION TIMER 0 seconds to 10 minutes	CURRENT (A) 5 A	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
COMPATIBLE WITH ELECTRONIC AUXILIARY	IP RATING IP20	VOLTAGE (V~) 230 V~
NUMBER OF POSSIBLE ELEMENTS 1 element	LINKABLE No	NUMBER OF WIRES 5
	TYPE OF MECHANISM Card	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 10	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	KIT INSTALLATION DIRECTION Vertical and horizontal
CLAW Included	INSTALLATION TYPE Suitable for surface and flush mounting	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw
REMOVAL OF COVER Only with tool		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE	PRODUCT NET WEIGHT	PACKAGING MEASUREMENT UNIT
8421053058381	0.09	MMT
UNITARY PACKAGING HEIGHT	UNITARY PACKAGING WEIGHT UNIT	PACKAGING VOLUME
0	KGM	329232
UNITARY PACKAGING WIDTH	PACKAGING EAN	PACKAGING VOLUME UNIT
0	8421053058381	MMQ
UNITARY PACKAGING LENGTH	UNITS CONTAINED PACKAGING	PACKAGING GROSS WEIGHT
0	1	0
UNITARY PACKAGING VOLUME	PACKAGING HEIGHT	PACKAGING NET WEIGHT
329232	57	0.09
UNITARY PACKAGING VOLUME UNIT	PACKAGING WIDTH	PACKAGING WEIGHT UNIT
MMQ	76	KGM
UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH	
0.09	76	

